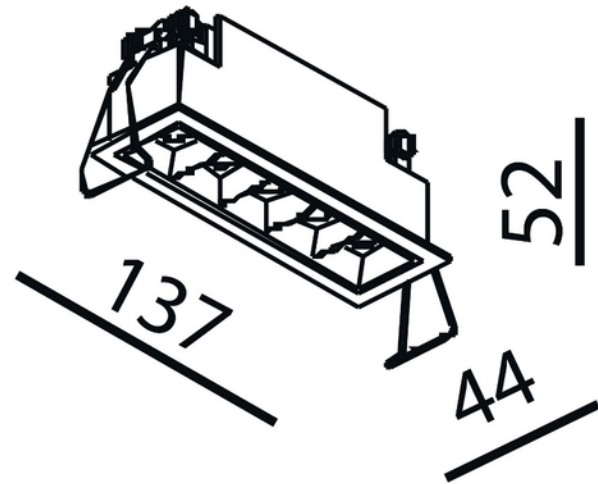


**PRODUCT DATA SHEET**

Cold 5 1150lm 930 30° 5x2W WH w/o driver

Art.no: 1107-30-3

*Lighting Solutions* 130x36mm

Cold 5 1150lm 930 30° 5x2W WH w/o driver



Cold white are delivered with white front ring. See accessories for optional front rings that can be bought separately, and correct choice of driver

ELECTRICAL DATA

Protection Class (system)	3
Dimming (system)	Depending on Driver
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA

IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA

Efficacy (system) (lm/W)	86
CRI / Ra (>=)	90

**PRODUCT DATA SHEET**

Cold 5 1150lm 930 30° 5x2W WH w/o driver

Art.no: 1107-30-3

*Lighting Solutions*

PHOTOMETRIC DATA	
CCT (Color Temperature) (K)	3000
Color Code	930
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	None
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	2
UGR (<=)	13
Manufacturer (light source)	Osram
Forward Current LED (min-max) (mA)	200 - 1800
Forward Voltage LED (max tp=25) (V)	15.0

DRIVER	
Manufacturer (driver)	No driver

DIMENSIONS	
Length (product) (mm)	137.0
Width (product) (mm)	44.0
Height (product) (mm)	52.0
Weight (product) (kg)	0.32

MATERIALS AND SURFACES	
Color	White
Housing Material	Aluminium
Housing Material %	89.0
Material 2%	1.7999999999999998
Material 3%	0.5
Material 4%	0.8999999999999999
Material 5%	1.3
Material 6%	1.9
Material 7%	4.6

INSTALLATION AND CONNECTION	
Areas of use	Bathroom, Cafe, Cottage, Generally, Hotel, Residence, Shop

**PRODUCT DATA SHEET**

Cold 5 1150lm 930 30° 5x2W WH w/o driver

Art.no: 1107-30-3

*Lighting Solutions***INSTALLATION AND CONNECTION**

Mounting	Recessed, Ceiling
Connection (system)	Depending on driver

ENERGY AND CERTIFICATIONS

CE mark	Yes
EPD number	NEPD-14537-15050