


**PRODUCT DATA SHEET**

Cold 5 1150lm 930 46° 5x2W BK w/o driver

Art.no: 1107-46-2

*Lighting Solutions*

130x36mm

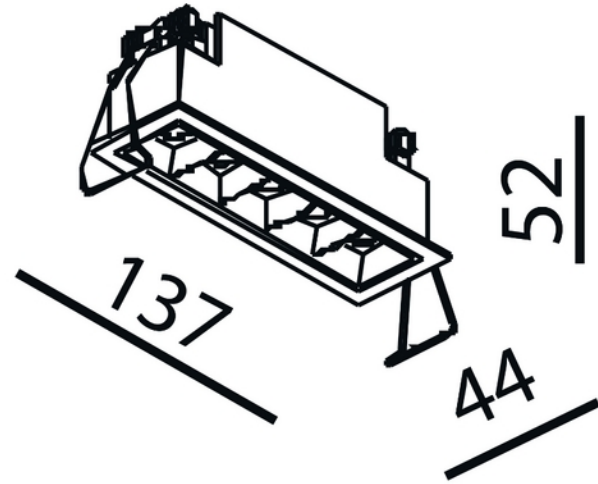

Cold 5 1150lm 930 46° 5x2W BK w/o driver



With its rectangular and recessed light source, Cold downlight has a unique design that is suitable for most rooms. Front ring is available in several different colors and can easily be replaced. Driver is not included. Please see accessories for recommended driver and alternative colors for front ring.

| ELECTRICAL DATA | |
|---------------------------|---------------------|
| Protection Class (system) | 3 |
| Dimming (system) | Depending on Driver |
| Voltage (system) [V] | 230V 50Hz |

| TECHNICAL DATA | |
|----------------|------|
| IP (system) | IP20 |
| Outdoor | No |

| PHOTOMETRIC DATA | |
|--------------------------|----|
| Efficacy (system) (lm/W) | 85 |

**PRODUCT DATA SHEET**

Cold 5 1150lm 930 46° 5x2W BK w/o driver

Art.no: 1107-46-2

*Lighting Solutions*

| PHOTOMETRIC DATA | |
|-------------------------------------|-----------------|
| CRI / Ra (>=) | 90 |
| CCT (Color Temperature) (K) | 3000 |
| Color Code | 930 |
| Lightsource Type | LED (built in) |
| Socket / Cap-Base | N/A |
| Lens (Diffuser) | None |
| Lifetime (h) | L80B10: 100 000 |
| MacAdam (SDCM) | 2 |
| UGR (<=) | 13 |
| Manufacturer (light source) | Osram |
| Forward Current LED (min-max) (mA) | 200 - 1800 |
| Forward Voltage LED (max tp=25) (V) | 15.0 |

| DRIVER | |
|-----------------------|-----------|
| Manufacturer (driver) | No driver |

| DIMENSIONS | |
|-----------------------|-------|
| Length (product) (mm) | 137.0 |
| Width (product) (mm) | 44.0 |
| Height (product) (mm) | 52.0 |
| Weight (product) (kg) | 0.32 |

| MATERIALS AND SURFACES | |
|------------------------|--------------------|
| Color | Black |
| Housing Material | Aluminium |
| Housing Material % | 89.0 |
| Material 2% | 1.7999999999999998 |
| Material 3% | 0.5 |
| Material 4% | 0.8999999999999999 |
| Material 5% | 1.3 |
| Material 6% | 1.9 |
| Material 7% | 4.6 |

| INSTALLATION AND CONNECTION | |
|-----------------------------|---|
| Areas of use | Bathroom, Cafe, Cottage, Generally, Hotel, Residence, |



PRODUCT DATA SHEET

Cold 5 1150lm 930 46° 5x2W BK w/o driver

Art.no: 1107-46-2



Lighting Solutions

| INSTALLATION AND CONNECTION | |
|-----------------------------|---------------------|
| | Shop |
| Mounting | Recessed, Ceiling |
| Connection (system) | Depending on driver |

| ENERGY AND CERTIFICATIONS | |
|---------------------------|------------------|
| CE mark | Yes |
| EPD number | NEPD-14537-15050 |