


**PRODUCT DATA SHEET**Cold 5 outdoor 1050lm 930 30° 5x2W BK (w/o driver)  
Art.no: 1108-30-2*Lighting Solutions*

130x37mm



## Cold 5 outdoor 1050lm 930 30° 5x2W BK (w/o driver)

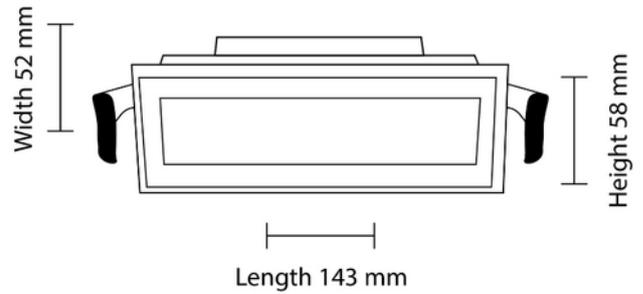

IP65 version of the popular Cold -series. With its rectangular shape and recessed light source, Cold provides a unique decorative design. See accessories for recommended driver. Cut-out 130x36mm.

ELECTRICAL DATA	
Protection Class (system)	3
Dimming (system)	Depending on Driver
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP65
Outdoor	Yes

PHOTOMETRIC DATA	
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	3000

**PRODUCT DATA SHEET**

Cold 5 outdoor 1050lm 930 30° 5x2W BK (w/o driver)

Art.no: 1108-30-2

*Lighting Solutions*

PHOTOMETRIC DATA	
Color Code	930
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	2
UGR (<=)	12
Manufacturer (light source)	Osram
Forward Current LED (min-max) (mA)	200 - 1800
Forward Voltage LED (max tp=25) (V)	15.0

DRIVER	
Manufacturer (driver)	No driver

DIMENSIONS	
Length (product) (mm)	143.0
Width (product) (mm)	52.0
Height (product) (mm)	58.0
Weight (product) (kg)	0.47

MATERIALS AND SURFACES	
Color	Black

INSTALLATION AND CONNECTION	
Areas of use	Outdoor
Mounting	Recessed, Ceiling
Connection (system)	Depending on driver

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	F
CE mark	Yes
EPD number	NEPD-14533-15054
Energy Efficiency Class	A++