


**PRODUCT DATA SHEET**

Rise L 1050lm 930 32° 9,2W WH/WH Phasecut  
Art.no: 11094-32-3



*Lighting Solutions*

 76x76mm

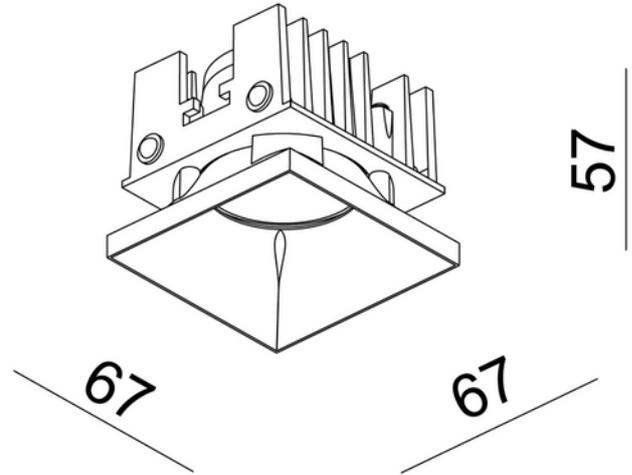

## Rise L 1050lm 930 32° 9,2W WH/WH Phasecut



Square downlight suitable for most rooms. Single and double installation kit are not included. Gold front ring can be bought separately.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	Phase-Cut
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	3000

**PRODUCT DATA SHEET**

Rise L 1050lm 930 32° 9,2W WH/WH Phasecut

Art.no: 11094-32-3

*Lighting Solutions*

PHOTOMETRIC DATA	
Color Code	930
Socket / Cap-Base	N/A
Manufacturer (light source)	Bridgelux
Forward Current LED (min-max) (mA)	350 - 700
Driftspenning LED (min tp=65) (V)	24.5

DRIVER	
Manufacturer (driver)	AcTEC
Protection Class (driver)	2
Max Output Voltage (V)	30
Dimming (driver)	Phase-Cut
Dimming Minimum Level (%)	1.0
Dimming Phasecut Type	Leading / Trailing edge
IP (driver)	IP20
Expected Lifetime (driver) (h)	30000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	500 - null
CC (forward voltage driver) (V)	12.0 - 24.0
Output Current Tolerance (%)	5.0
Current Ripple (%)	50.0
Max load pr circuit - B10	35
Max load pr circuit - B16	56
Max load pr circuit - C10	74
Max load pr circuit - C16	118
Leakage current (mA)	0.7
Inrush current time (µs)	300.0
Inrush current I <sub>max</sub> (A)	5.0

DIMENSIONS	
Length (product) (mm)	67.0
Width (product) (mm)	67.0
Height (product) (mm)	57.0

MATERIALS AND SURFACES	
Color	White

**PRODUCT DATA SHEET**

Rise L 1050lm 930 32° 9,2W WH/WH Phasecut

Art.no: 11094-32-3

*Lighting Solutions*

INSTALLATION AND CONNECTION	
Areas of use	Cottage, Hotel, Kitchen, Residence
Mounting	Recessed, Ceiling
Connection (system)	Terminal

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A

ALTERNATIVE DRIVERS	
Current Setting Existing Driver	500 - null