

**PRODUKTDATABLAD**

Cold 10 2200lm 930 30° 10x2W WH w/BK front ring w/o driver


Art.no: 1111-30-32



Lighting Solutions



250x36mm

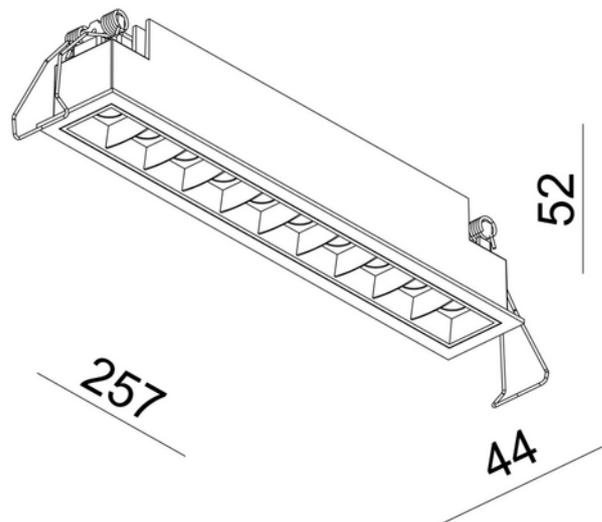

Cold 10 2200lm 930 30° 10x2W WH w/BK front ring w/o driver



Med sin rektangulære form og inntrukket lyskilde har Cold downlight et unikt dekorativt design som egner seg i de fleste rom. Frontring leveres i flere farger og byttes enkelt ut, se tilbehør for alternativ farge på front ring.

Driver medfølger ikke. Se tilbehør under.

ELEKTRISKE DATA	
Beskyttelsesklasse	3
Dimmefunksjon (system)	Avhengig av driver
Spenning (V)	230V 50Hz
Driftspenning LED (mA)	700
Effekt (system) (W)	2x10

TEKNISK DATA	
IP (system)	IP20

**PRODUKTDATABLAD**

Cold 10 2200lm 930 30° 10x2W WH w/BK front ring w/o driver

Art.no: 1111-30-32

*Lighting Solutions*

TEKNISK DATA	
Produkt Familie	Cold 10 White w/ Black front ring
Utendørs	No
Hullmål (mm)	250x36

LYSTEKNISKE DATA	
Lumen ut (system) (lm)	2150
Kald lumen (t=25) fra chip (lm)	2100
Effektivitet (system) (lm/W)	97
Fargegjengivelse (CRI / Ra) (>=)	90
Fargetemperatur (CCT) (K)	3000
Fargekode	930
Lyskildetype	LED (innebygget)
Sokkel / Base	N/A
Linse (Diffusor)	Ingen
Strålevinkel (°)	30°
Levetid (t)	L80B10: 100 000
Driftstrøm LED (min-max) (mA)	700 - null
Driftspenning LED (max tp=25) (V)	30.0

DIMENSJONER	
Lengde (produkt) (mm)	257.0
Bredde (produkt) (mm)	44.0
Høyde (produkt) (mm)	52.0
Vekt (produkt) (kg)	0.7

MATERIALER OG OVERFLATER	
Farge	Hvit/Sort
Kapslingsmateriale	Aluminium
Housing Material %	89.0
Materiale 2	Mechanical installed part(Steel)
Materiale 2%	1.7999999999999998
Materiale 3	LED Emitter Chip Indium Gallium

**PRODUKTDATABLAD**

Cold 10 2200lm 930 30° 10x2W WH w/BK front ring w/o driver

Art.no: 1111-30-32

*Lighting Solutions*

MATERIALER OG OVERFLATER	
	Aluminium Phosphorus LED frame Iron Silver Copper Nickel Silver Epoxy Silver Resin
Materiale 3%	0.5
Materiale 4	PCB board for LED: Silica,vitreous Aluminium oxide Calcium-oxide Magnesium-oxide Copper Zinc(metal) Phenol,4,4'- (1- methylethylidene)bis(2,6- dibromo-,polymer with(chloromethyl)oxirane and 4,4'- (1- methylethylidene)bis(phenol) z-FTODEHoC dca,z-fME[lyl- polymer with butyl 2-propenoate and methyl 2-methyl-2 propenoate Phenol,4,4'- (1- methylethylidene)bis-,polymer with 2-aminoethanol and 2- chloromethyl)oxirane Barium sulphate Silicon dioxide Polychloro copper phthalocyanine Tin Cu
Materiale 4%	0.8999999999999999
Materiale 5	internal Cable with Connectors Copper PVC materials Diocetyl Phthalate Diisodecyl phthalate Calcium zinc stabilizer Resin Polyamide Silver
Materiale 5%	1.3

**PRODUKTDATABLAD**

Cold 10 2200lm 930 30° 10x2W WH w/BK front ring w/o driver

Art.no: 1111-30-32

*Lighting Solutions*

MATERIALER OG OVERFLATER	
Materiale 6	PC cover and connecto TS. Polycarbonate
Materiale 6%	1.9
Materiale 7	LED driver: Copper Epoxy Zinc Nickel Arsenic TBBP-A Polycarbonate Ethylene glycol Glassfiber Titanate Ferrites Silicon-dioxide Aluminium Polyamide 6 Thermoplast
Materiale 7%	4.6

MONTERING OG TILKOBLING	
Bruksområde	Bad, Cafe, Hytte, Generelt, Hotell, Bolig, Butikk
Montering	Innfelt, Tak
Tilkobling (system)	Depending on driver

ENERGI OG GODKJENNING	
EPREL Energiklasse	F
CE-merke	Yes
EPD-nummer	NEPD-14534-15053
Energy Efficiency Class	A++ - A

ALTERNATIVE DRIVERE	
Strøminstilling LED	700