


**PRODUCT DATA SHEET**

Halo Pendant 5000lm 830 120° 43W BK Phasecut Ø120cm
 Art.no: 1128-2-120-2

*Lighting Solutions*

Halo Pendant 5000lm 830 120° 43W BK Phasecut Ø120cm

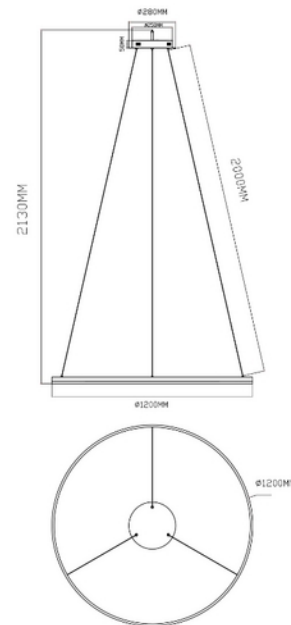

The Halo pendant range consists of 3 different sizes circular luminaires, they are made from aluminum, coated with a golden matt color. The opal surface covering the LED's gives a very pleasant warm light in 3000 Kelvin. The length of the wires holding the circular luminaires can be adjusted on site making the Halo pendant very flexible for decorative purposes (wire length is 200cm).

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	Phase-Cut
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No
Operating temperature (°C)	-20 - 45

**PRODUCT DATA SHEET**

Halo Pendant 5000lm 830 120° 43W BK Phasecut Ø120cm

Art.no: 1128-2-120-2

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	51
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Lightsource Type	LED (built in)
Lens (Diffuser)	Frosted
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	6
UGR (<=)	16
Forward Current LED (min-max) (mA)	6 - 28
Forward Voltage LED (max tp=25) (V)	3.4
Driftspenning LED (min tp=65) (V)	2.6

DIMENSIONS	
Length (product) (mm)	1200.0
Width (product) (mm)	1200.0
Height (product) (mm)	34.0
Weight (product) (kg)	3.0

MATERIALS AND SURFACES	
Color	Black

INSTALLATION AND CONNECTION	
Areas of use	Cafe, Hotel, Open access areas, Restaurant, Shop, Showroom
Mounting	Ceiling, Pendant
Connection (system)	18i3 Quick connection

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	G
CE mark	Yes
Energy Efficiency Class	A++ - A

ALTERNATIVE DRIVERS	
Current Setting (mA) ?	1050



PRODUCT DATA SHEET

Halo Pendant 5000lm 830 120° 43W BK Phasecut Ø120cm

Art.no: 1128-2-120-2



Lighting Solutions