


**PRODUCT DATA SHEET**

Leila 2340lm 830 Opal 25W WH 18i5 DALI Emergency
 Art.no: 15072-01E-3-ddd

*Lighting Solutions*
 190mm


Leila 2340lm 830 Opal 25W WH 18i5 DALI Emergency

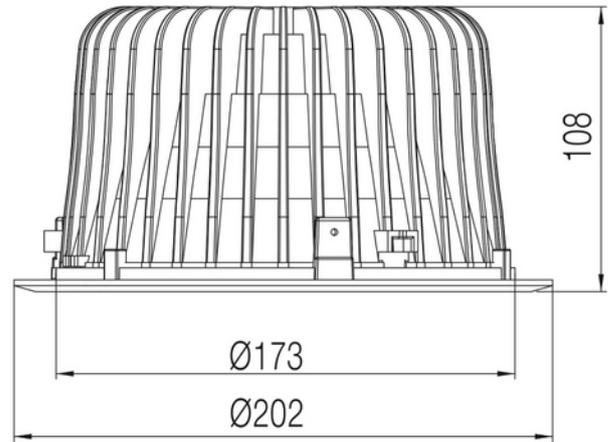

This bestseller has quickly become an industry standard within recessed general lighting. Leila is designed with opal diffuser and reflector, this ensures high lumen output with no glare.

ELECTRICAL DATA	
Protection Class (system)	3
Dimming (system)	DALI
Voltage (system) [V]	230V 50Hz
Emergency light (h)	3 hours
Emergency light testing	Manual

TECHNICAL DATA	
IP (system)	IP40
Outdoor	Yes

**PRODUCT DATA SHEET**

Leila 2340lm 830 Opal 25W WH 18i5 DALI Emergency
Art.no: 15072-01E-3-ddd



Lighting Solutions

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	78
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Opal
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
UGR (<=)	22
Manufacturer (light source)	Osram
Forward Voltage LED (max tp=25) (V)	38.0
Driftspenning LED (min tp=65) (V)	36.0
Emergency lumen out (lm)	375

DRIVER	
Protection Class (driver)	1 or 2
Max Output Voltage (V)	60
Dimming Minimum Level (%)	1.0
Dimming output type	Amplitude Modulation
IP (driver)	IP20
Expected Lifetime (driver) (h)	100000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	350 - 1050
CC (forward voltage driver) (V)	20.0 - 50.0
Output Current Tolerance (%)	3.0
Current Ripple (%)	2.5
Max load pr circuit - B10	19
Max load pr circuit - B16	32
Max load pr circuit - C10	31
Max load pr circuit - C16	53
Leakage current (mA)	0.15
Inrush current time (µs)	151.0
Inrush current I _{max} (A)	26.0

**PRODUCT DATA SHEET**

Leila 2340lm 830 Opal 25W WH 18i5 DALI Emergency
Art.no: 15072-01E-3-ddd



Lighting Solutions

DIMENSIONS	
Width (product) (mm)	205.0
Height (product) (mm)	102.0
Weight (product) (kg)	1.2

MATERIALS AND SURFACES	
Color	White

INSTALLATION AND CONNECTION	
Areas of use	Generally, Office, Shop
Mounting	Recessed, Ceiling
Connection (system)	18i5 DALI Quick connection

ENERGY AND CERTIFICATIONS	
CE mark	Yes
EPD number	NEPD-11059-11007
Energy Efficiency Class	A+

LIGHT DISTRIBUTION