


**PRODUCT DATA SHEET**

Leila 2340lm 840 Opal 25W Ral 9003 18i5 DALI
 Art.no: 15073-01-5-ddd

*Lighting Solutions*
 190mm


Leila 2340lm 840 Opal 25W Ral 9003 18i5 DALI

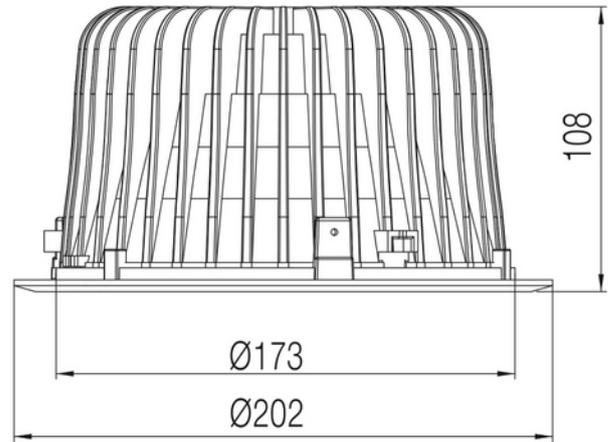

This bestseller has quickly become an industry standard within recessed general lighting. Leila is designed with opal diffuser and reflector, this ensures high lumen output with no glare.

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	DALI
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	78
CRI / Ra (>=)	80

**PRODUCT DATA SHEET**

Leila 2340lm 840 Opal 25W Ral 9003 18i5 DALI

Art.no: 15073-01-5-ddd

*Lighting Solutions*

PHOTOMETRIC DATA	
CCT (Color Temperature) (K)	4000
Color Code	840
Lightsource Type	LED (built in)
Lens (Diffuser)	Opal
Lifetime (h)	L80B10: 100 000
UGR (<=)	22

DRIVER	
Manufacturer (driver)	Tridonic
Protection Class (driver)	1 or 2
Max Output Voltage (V)	54
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	600 - null
CC (forward voltage driver) (V)	30.0 - 43.0
Output Current Tolerance (%)	7.5
Current Ripple (%)	30.0
Max load pr circuit - B10	55
Max load pr circuit - B16	90
Max load pr circuit - C10	65
Max load pr circuit - C16	100
Inrush current time (μ s)	100.0
Inrush current I _{max} (A)	8.0

DIMENSIONS	
Width (product) (mm)	202.0
Height (product) (mm)	108.0
Weight (product) (kg)	1.15

MATERIALS AND SURFACES	
Color	White

INSTALLATION AND CONNECTION	
Areas of use	Generally, Office, Shop



PRODUCT DATA SHEET

Leila 2340lm 840 Opal 25W Ral 9003 18i5 DALI
Art.no: 15073-01-5-ddd



Lighting Solutions

INSTALLATION AND CONNECTION	
Mounting	Recessed, Ceiling
Connection (system)	18i5 DALI Quick connection

ENERGY AND CERTIFICATIONS	
CE mark	Yes
EPD number	NEPD-11059-11007
Energy Efficiency Class	A++ - A

LIGHT DISTRIBUTION

