


**PRODUCT DATA SHEET**

Leila Maxi 3700lm 830 33W Opal Ø230mm GR 18i3

Art.no: 15074-01-1

*Lighting Solutions*

210mm

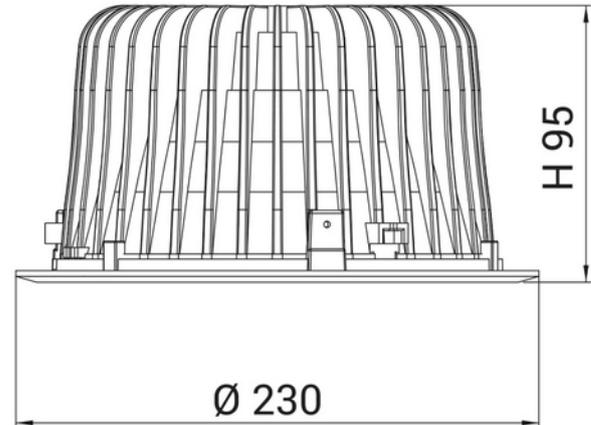

Leila Maxi 3700lm 830 33W Opal Ø230mm GR 18i3



This bestseller has quickly become an industry standard within recessed general lighting. Leila is designed with opal diffuser and reflector, this ensures high lumen output with no glare. The luminaire has 18i3 connector and can be supplied with a variety of connector options.

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	79

**PRODUCT DATA SHEET**

Leila Maxi 3700lm 830 33W Opal Ø230mm GR 18i3

Art.no: 15074-01-1

*Lighting Solutions*

PHOTOMETRIC DATA	
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Lightsource Type	LED (built in)
Lens (Diffuser)	Opal
Lifetime (h)	L80B10: 50.000
UGR (<=)	23
Manufacturer (light source)	Lumileds

DRIVER	
Manufacturer (driver)	Tridonic
Protection Class (driver)	1 or 2
Max Output Voltage (V)	60
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	900 - null
CC (forward voltage driver) (V)	25.0 - 45.0
Output Current Tolerance (%)	7.5
Current Ripple (%)	5.0
Max load pr circuit - B10	14
Max load pr circuit - B16	24
Max load pr circuit - C10	24
Max load pr circuit - C16	40
Inrush current time (µs)	150.0
Inrush current I _{max} (A)	25.0

DIMENSIONS	
Width (product) (mm)	230.0
Height (product) (mm)	100.0
Weight (product) (kg)	1.6

MATERIALS AND SURFACES	
Color	Grey

**PRODUCT DATA SHEET**

Leila Maxi 3700lm 830 33W Opal Ø230mm GR 18i3
Art.no: 15074-01-1



Lighting Solutions

INSTALLATION AND CONNECTION	
Areas of use	Generally, Office, Shop
Mounting	Recessed, Ceiling
Connection (system)	18i3 Quick connection

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A

ALTERNATIVE DRIVERS	
Current Setting (mA) ?	900

LIGHT DISTRIBUTION