


**PRODUCT DATA SHEET**

Leila Maxi 2950lm 930 33W Opal Ø230mm BK 18i5 DALI
 Art.no: 15076-01-2-ddd

*Lighting Solutions*
 210mm


Leila Maxi 2950lm 930 33W Opal Ø230mm BK 18i5 DALI

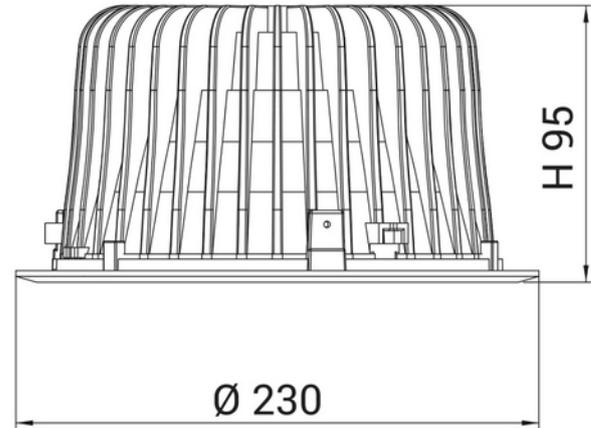

This bestseller has quickly become an industry standard within recessed general lighting. Leila is designed with opal diffuser and reflector, this ensures high lumen output with no glare. The luminaire has 18i3 connector and can be supplied with a variety of connector options.

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	DALI2
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
CRI / Ra (>=)	90

**PRODUCT DATA SHEET**

Leila Maxi 2950lm 930 33W Opal Ø230mm BK 18i5 DALI

Art.no: 15076-01-2-ddd

*Lighting Solutions*

PHOTOMETRIC DATA	
CCT (Color Temperature) (K)	3000
Color Code	930
Lightsource Type	LED (built in)
Lens (Diffuser)	Opal
Lifetime (h)	L80B10: 50.000
UGR (<=)	23
Manufacturer (light source)	Lumileds

DRIVER	
Manufacturer (driver)	Tridonic
Protection Class (driver)	1 or 2
Standby power Psb (W) <	0.15
Flicker metric (Pst LM) <	1.0
Stroboscopic effect metric (SVM) <	0.4
Max Output Voltage (V)	60
Dimming (driver)	CLO, Corridor, DALI2, Push, Ready2Mains
Dimming Minimum Level (%)	1.0
Dimming output type	Amplitude Modulation
IP (driver)	IP20
Expected Lifetime (driver) (h)	100000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	500 - 1400
Current setting (driver)	DALI-2, I-Select 2 Plug (Tridonic), Ready2Mains
CC (forward voltage driver) (V)	25.0 - 49.9
Output Current Tolerance (%)	3.0
Current Ripple (%)	2.0
Max load pr circuit - B10	14
Max load pr circuit - B16	23
Max load pr circuit - C10	23
Max load pr circuit - C16	38
Leakage current (mA)	0.16
Inrush current time (µs)	200.0
Inrush current I _{max} (A)	23.0

**PRODUCT DATA SHEET**

Leila Maxi 2950lm 930 33W Opal Ø230mm BK 18i5 DALI
Art.no: 15076-01-2-ddd



Lighting Solutions

DIMENSIONS	
Width (product) (mm)	230.0
Height (product) (mm)	100.0
Weight (product) (kg)	1.6

MATERIALS AND SURFACES	
Color	Black

INSTALLATION AND CONNECTION	
Areas of use	Generally, Office, Shop
Mounting	Recessed, Ceiling
Connection (system)	18i5 DALI Quick connection

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A

ALTERNATIVE DRIVERS	
Current Setting (mA) ?	900

LIGHT DISTRIBUTION