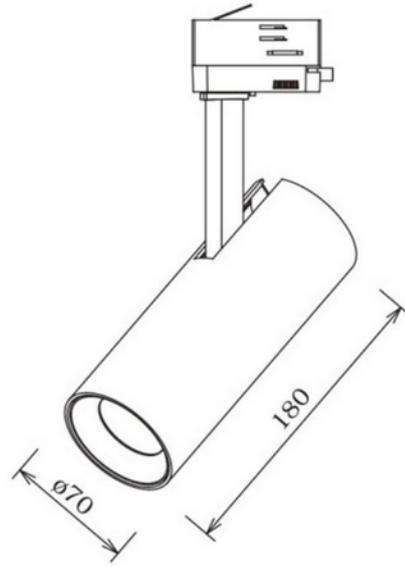


**PRODUCT DATA SHEET**

Cylinder 70 2500lm 940 15° 20W BK 3-circuit

Art.no: 17057-15-2

*Lighting Solutions*

Cylinder 70 2500lm 940 15° 20W BK 3-circuit



The Cylinder uses the possibilities created by new technology. The LED driver is mounted inside the luminaire body. This gives us a slim design combined with a powerful light output that can be easily adjusted in all directions to meet all needs. Cylinder can be tilted 90 degrees and rotated 350 degrees its own axis. To create further opportunities to "play" with light you can mount a diffuser on the luminaire, this can be ordered separately.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

**PRODUCT DATA SHEET**

Cylinder 70 2500lm 940 15° 20W BK 3-circuit

Art.no: 17057-15-2

*Lighting Solutions*

PHOTOMETRIC DATA	
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	4000
Color Code	940
Lightsource Type	LED (built in)
Lens (Diffuser)	Clear
UGR (<=)	21
Manufacturer (light source)	Tridonic

DRIVER	
Manufacturer (driver)	Tridonic
Protection Class (driver)	1 or 2
Max Output Voltage (V)	60
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	500 - null
CC (forward voltage driver) (V)	21.4 - 44.0
Output Current Tolerance (%)	7.5
Current Ripple (%)	15.0
Max load pr circuit - B10	72
Max load pr circuit - B16	115
Max load pr circuit - C10	90
Max load pr circuit - C16	144
Inrush current time (µs)	100.0
Inrush current I _{max} (A)	5.0

DIMENSIONS	
Length (product) (mm)	180.0
Width (product) (mm)	70.0
Height (product) (mm)	225.0
Weight (product) (kg)	0.85

MATERIALS AND SURFACES	
Color	Black



PRODUCT DATA SHEET
Cylinder 70 2500lm 940 15° 20W BK 3-circuit
Art.no: 17057-15-2



Lighting Solutions

INSTALLATION AND CONNECTION	
Areas of use	Cafe, Cottage, Hotel, Office, Residence, Restaurant, Shop
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A