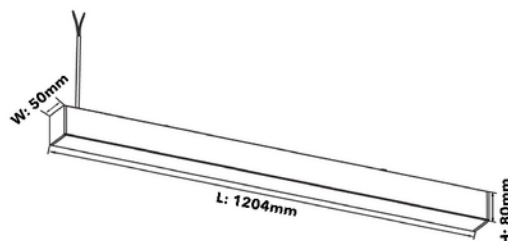


**PRODUCT DATA SHEET**

Linear 4300lm 830/835/840 Opal 36W BK Track 3-circuit

Art.no: 19041-02-2

*Lighting Solutions*

Linear 4300lm 830/835/840 Opal 36W BK Track 3-circuit

**ELECTRICAL DATA**

Protection Class (system)	2
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA

IK (system)	IK08
IP (system)	IP40
Outdoor	No

PHOTOMETRIC DATA

CRI / Ra ($\geq$)	80
CCT (Color Temperature) (K)	30/35/4000K
Color Code	830/835/840

**PRODUCT DATA SHEET**

Linear 4300lm 830/835/840 Opal 36W BK Track 3-circuit

Art.no: 19041-02-2

*Lighting Solutions***PHOTOMETRIC DATA**

Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Opal
Manufacturer (light source)	Runlite

DRIVER

Manufacturer (driver)	Lifud
Protection Class (driver)	1 or 2
Max Output Voltage (V)	55
Dimming Minimum Level (%)	10.0
IP (driver)	IP20
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	950 - null
CC (forward voltage driver) (V)	25.0 - 42.0
Output Current Tolerance (%)	5.0
Current Ripple (%)	2.0
Max load pr circuit - B10	23
Max load pr circuit - B16	39
Max load pr circuit - C10	38
Max load pr circuit - C16	64
Leakage current (mA)	0.7
Inrush current time (µs)	15.0
Inrush current I _{max} (A)	58.0

DIMENSIONS

Length (product) (mm)	1204.0
Width (product) (mm)	50.0
Height (product) (mm)	140.0
Weight (product) (kg)	3.5

MATERIALS AND SURFACES

Color	Black
-------	-------

INSTALLATION AND CONNECTION

Mounting	Track, Ceiling
----------	----------------

**PRODUCT DATA SHEET**

Linear 4300lm 830/835/840 Opal 36W BK Track 3-circuit

Art.no: 19041-02-2

*Lighting Solutions***INSTALLATION AND CONNECTION**

Connection (system)	Track 3-Circuit
---------------------	-----------------

ENERGY AND CERTIFICATIONS

CE mark	Yes
Energy Efficiency Class	A++ - A

LIGHT DISTRIBUTION