


**PRODUCT DATA SHEET**

Linear 3400lm 930/935/940 Opal 36W BK Track 3-circuit DALI
Art.no: 19042-02-2-ddd



Lighting Solutions

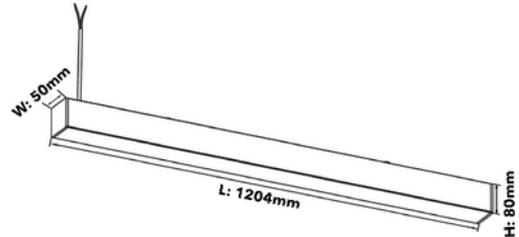

Linear 3400lm 930/935/940 Opal 36W BK Track 3-circuit DALI



ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	DALI2
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK08
IP (system)	IP40
Outdoor	No

PHOTOMETRIC DATA	
CRI / Ra (>=)	90

**PRODUCT DATA SHEET**

Linear 3400lm 930/935/940 Opal 36W BK Track 3-circuit DALI

Art.no: 19042-02-2-ddd

*Lighting Solutions*

PHOTOMETRIC DATA	
CCT (Color Temperature) (K)	30/35/4000K
Color Code	930/935/940
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Opal
Manufacturer (light source)	Runlite

DRIVER	
Manufacturer (driver)	Boke
Flicker metric (Pst LM) <	0.003
Stroboscopic effect metric (SVM) <	0.005
Max Output Voltage (V)	42
Dimming output type	Amplitude Modulation
IP (driver)	IP20
Flicker-free	Yes
Constant current or voltage (CC or CV)	CC
CV (driver) [V]	42
Max load pr circuit - B10	35
Max load pr circuit - B16	56
Max load pr circuit - C10	35
Max load pr circuit - C16	56
Max load pr circuit - C20	70
Max load pr circuit - C25	87
Leakage current (mA)	0.7
Inrush current time (μ s)	186.0
Inrush current I _{max} (A)	7.6

DIMENSIONS	
Length (product) (mm)	1204.0
Width (product) (mm)	50.0
Height (product) (mm)	140.0
Weight (product) (kg)	3.5

MATERIALS AND SURFACES	
Color	Black

**PRODUCT DATA SHEET**

Linear 3400lm 930/935/940 Opal 36W BK Track 3-circuit DALI

Art.no: 19042-02-2-ddd

*Lighting Solutions*

INSTALLATION AND CONNECTION	
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A

LIGHT DISTRIBUTION