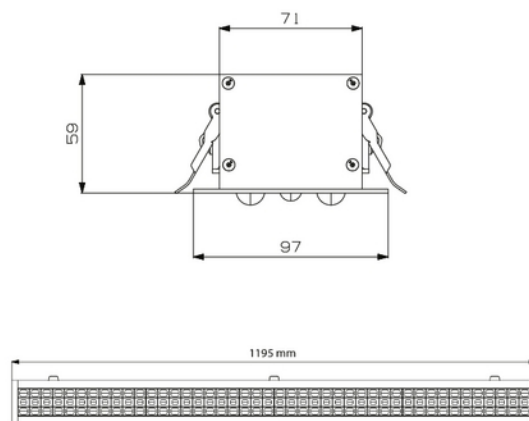


**PRODUCT DATA SHEET**

Linea Market Recessed 5000lm 830 50W WH 18i3 D.Asym L1195mm

Art.no: 19435-04-3

*Lighting Solutions*

Linea Market Recessed 5000lm 830 50W WH 18i3 D.Asym L1195mm



Linea Market Recessed is a luminaire designed for recessing in suspended ceiling. The luminaire has double asymmetric lens optics. This allows the luminaire illuminates the shelves of shops in a very good manner. Linea Market Recessed has EPCOM18i3 chassis connector and can be supplied with a variety of different connector options

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

**PRODUCT DATA SHEET**

Linea Market Recessed 5000lm 830 50W WH 18i3 D.Asym L1195mm

Art.no: 19435-04-3

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	123
CRI / Ra ($\geq$)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Socket / Cap-Base	N/A
Lens (Diffuser)	Micropris.

DRIVER	
Manufacturer (driver)	Tridonic
Protection Class (driver)	1 or 2
Max Output Voltage (V)	250
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	250 - 350
CC (forward voltage driver) (V)	71.0 - 150.0
Output Current Tolerance (%)	7.5
Current Ripple (%)	5.0
Max load pr circuit - B10	25
Max load pr circuit - B16	24
Max load pr circuit - C10	23
Max load pr circuit - C16	40
Leakage current (mA)	0.45
Inrush current time (μ s)	280.0
Inrush current I _{max} (A)	25.0

DIMENSIONS	
Length (product) (mm)	1195.0
Width (product) (mm)	97.0
Height (product) (mm)	59.0
Weight (product) (kg)	3.3

MATERIALS AND SURFACES	
Color	White

**PRODUCT DATA SHEET**

Linea Market Recessed 5000lm 830 50W WH 18i3 D.Asym L1195mm
Art.no: 19435-04-3



Lighting Solutions

INSTALLATION AND CONNECTION

Connection (system)	Cable 1.2m
---------------------	------------

ENERGY AND CERTIFICATIONS

CE mark	Yes
Energy Efficiency Class	A++