


**PRODUCT DATA SHEET**

Proxima 2700lm 830/840/857 Switch 90° 25W WH
 Art.no: 2101-90-3

*Lighting Solutions*
 200-210mm


Proxima 2700lm 830/840/857 Switch 90° 25W WH

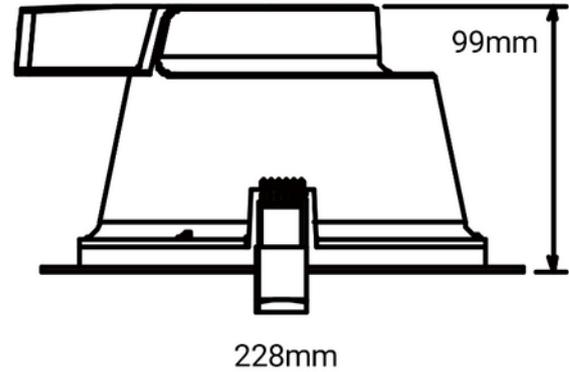

Proxima is an integrated downlight that combine efficiency, light comfort and design. Comes with switch option between 3000K(default), 4000K and 5700K. QuickConnect for easy installation. Alla data are based on 4000K.

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK06
IP (system)	IP54
Outdoor	No

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	106

**PRODUCT DATA SHEET**

Proxima 2700lm 830/840/857 Switch 90° 25W WH

Art.no: 2101-90-3

*Lighting Solutions*

PHOTOMETRIC DATA	
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3/4/5700
Color Code	830/840/857
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 50.000
MacAdam (SDCM)	3
Manufacturer (light source)	Everlight
Forward Voltage LED (max tp=25) (V)	75.0
Driftspenning LED (min tp=65) (V)	65.0

DRIVER	
Output Current Tolerance (%)	5.0
Current Ripple (%)	5.0
Max load pr circuit - B10	24
Max load pr circuit - B16	38
Max load pr circuit - C10	24
Max load pr circuit - C16	38
Inrush current time (μ s)	8.0
Inrush current I _{max} (A)	106.0

DIMENSIONS	
Width (product) (mm)	228.0
Height (product) (mm)	98.0

MATERIALS AND SURFACES	
Color	White

INSTALLATION AND CONNECTION	
Areas of use	Generally, Hotel
Mounting	Recessed, Ceiling
Connection (system)	QuickConnect



PRODUCT DATA SHEET

Proxima 2700lm 830/840/857 Switch 90° 25W WH

Art.no: 2101-90-3



Lighting Solutions

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	F
CE mark	Yes
Energy Efficiency Class	A++ - A

LIGHT DISTRIBUTION

