


**PRODUCT DATA SHEET**

Situla 3200lm 830 45° 35W WH w/o driver

Art.no: 2103-45-3

*Lighting Solutions*

205-220mm

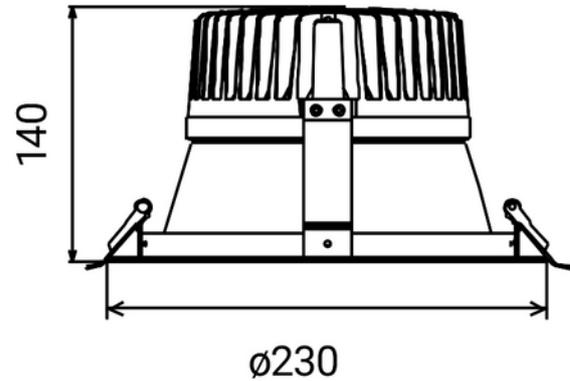

Situla 3200lm 830 45° 35W WH w/o driver



This unique design skillfully prevent the human eyes contact with the light sources directly, makes the light more soft, with low UGR. Meanwhile the light efficiency reach to 90lm/w with perfect accent lighting performance. That makes it become the priority selected product for commercial lighting.

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	Depending on Driver
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK06
IP (system)	IP20
Outdoor	No

**PRODUCT DATA SHEET**

Situla 3200lm 830 45° 35W WH w/o driver

Art.no: 2103-45-3

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	91
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 50.000
MacAdam (SDCM)	3
Forward Voltage LED (max tp=25) (V)	40.0
Driftspenning LED (min tp=65) (V)	27.0

DIMENSIONS	
Width (product) (mm)	230.0
Height (product) (mm)	140.0

MATERIALS AND SURFACES	
Color	White

INSTALLATION AND CONNECTION	
Areas of use	Cafe, Generally, Hotel, Office, Open access areas, School, Shop
Mounting	Recessed, Ceiling
Connection (system)	Depending on driver

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	F
CE mark	Yes
Energy Efficiency Class	A++ - A



PRODUCT DATA SHEET

Situla 3200lm 830 45° 35W WH w/o driver

Art.no: 2103-45-3



Lighting Solutions

LIGHT DISTRIBUTION

