


**PRODUCT DATA SHEET**

Antares 3550lm 830/840/857 Switch 90° 30W WH Opal w/o driver

Art.no: 2107-90-3

*Lighting Solutions*

230-260mm

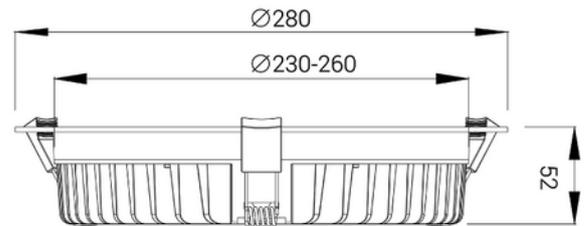

Antares 3550lm 830/840/857 Switch 90° 30W WH Opal w/o driver



Antares downlight have high lumen output and PMMA diffuser with even light distribution. Choose between opal or microprismatic diffuser. Comes with a switch option between 3000K(default), 4000K and 5700K. All data is based on 4000K.

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	Depending on Driver
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK06
IP (system)	IP20
Outdoor	No

**PRODUCT DATA SHEET**

Antares 3550lm 830/840/857 Switch 90° 30W WH Opal w/o driver

Art.no: 2107-90-3

*Lighting Solutions*

PHOTOMETRIC DATA	
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3/4/5700
Color Code	830/840/857
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Opal
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
Manufacturer (light source)	Everlight
Forward Voltage LED (max tp=25) (V)	38.0
Driftspenning LED (min tp=65) (V)	35.0

DIMENSIONS	
Width (product) (mm)	280.0
Height (product) (mm)	52.0

MATERIALS AND SURFACES	
Color	White

INSTALLATION AND CONNECTION	
Areas of use	Cafe, Generally, Hotel, Office, Restaurant, School, Shop, Showroom
Mounting	Recessed, Ceiling
Connection (system)	Depending on driver

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	F
CE mark	Yes
Energy Efficiency Class	A++ - A



PRODUCT DATA SHEET

Antares 3550lm 830/840/857 Switch 90° 30W WH Opal w/o driver

Art.no: 2107-90-3



Lighting Solutions

LIGHT DISTRIBUTION

