


**PRODUCT DATA SHEET**Antares 1750lm 830/840/857 90° 18W WH Prism w/o driver
Art.no: 2125-90-3*Lighting Solutions*

200-210mm



Antares 1750lm 830/840/857 90° 18W WH Prism w/o driver

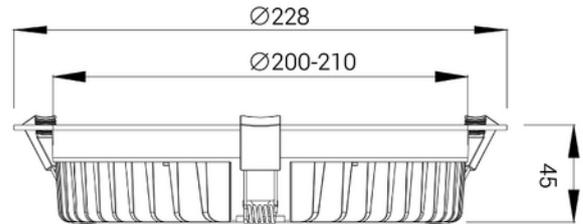

Antares downlight have high lumen output and PMMA diffuser with even light distribution. Comes with a switch option between 3000K(default), 4000K and 5700K. All data is based on 4000K.

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	Depending on Driver
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK06
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	91

**PRODUCT DATA SHEET**

Antares 1750lm 830/840/857 90° 18W WH Prism w/o driver

Art.no: 2125-90-3

*Lighting Solutions*

PHOTOMETRIC DATA	
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3/4/5700
Color Code	830/840/857
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Micropris.
Lifetime (h)	L80B10: 64 000
MacAdam (SDCM)	3
Forward Voltage LED (max tp=25) (V)	33.0
Driftspenning LED (min tp=65) (V)	29.0

DRIVER	
Max load pr circuit - C10	67
Max load pr circuit - C16	107

DIMENSIONS	
Width (product) (mm)	228.0
Height (product) (mm)	45.0

MATERIALS AND SURFACES	
Color	White

INSTALLATION AND CONNECTION	
Areas of use	Generally, Hotel, Office, Restaurant, School, Shop, Showroom
Mounting	Recessed, Ceiling
Connection (system)	Depending on driver

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	F
CE mark	Yes
Energy Efficiency Class	A++ - A