


**PRODUCT DATA SHEET**

Sign Today Mini 2600lm 840 105x90° 18W IP65 BK 1m cable
 Art.no: 2131-2

*Lighting Solutions*

Sign Today Mini 2600lm 840 105x90° 18W IP65 BK 1m cable

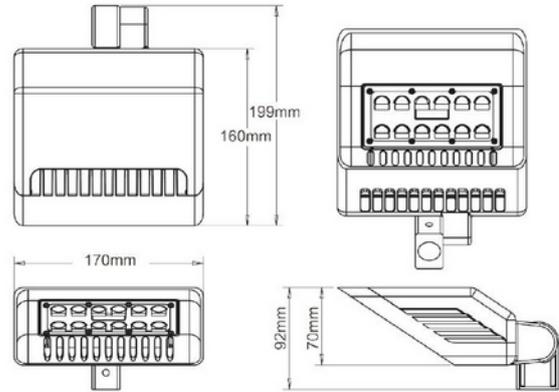

Sign Today Mini comes with a 105x90° beam angle. The luminaire is manufactured in die cast aluminum. Sign Today has built-in LED driver and comes with 1m cable. 50cm stick or wall bracket must be ordered separately. See accessories for options.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK08
IP (system)	IP65
Outdoor	Yes
Operating temperature (°C)	-20 - 40

**PRODUCT DATA SHEET**

Sign Today Mini 2600lm 840 105x90° 18W IP65 BK 1m cable

Art.no: 2131-2

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	135
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	4000
Color Code	840
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
MacAdam (SDCM)	3

DRIVER	
Max load pr circuit - B10	60
Max load pr circuit - B16	96
Max load pr circuit - C10	69
Max load pr circuit - C16	110
Max load pr circuit - C20	137

DIMENSIONS	
Length (product) (mm)	170.0
Width (product) (mm)	140.0
Height (product) (mm)	70.0
Weight (product) (kg)	0.9

MATERIALS AND SURFACES	
Color	Black
RAL Code	RAL9004
Housing Material	Aluminium

INSTALLATION AND CONNECTION	
Areas of use	Outdoor, Sign
Mounting	Surface, Wall
Connection (system)	Terminal

ENERGY AND CERTIFICATIONS	
CE mark	Yes



PRODUCT DATA SHEET

Sign Today Mini 2600lm 840 105x90° 18W IP65 BK 1m cable

Art.no: 2131-2



Lighting Solutions

ENERGY AND CERTIFICATIONS	
Energy Efficiency Class	A+

LIGHT DISTRIBUTION

