


**PRODUCT DATA SHEET**

Ceto Mini Fixed 500lm 8W D2W 930-918 36° WH Phasecut 83mm  
 Art.no: 21927-D2W-36-3

*Lighting Solutions*
 83mm


## Ceto Mini Fixed 500lm 8W D2W 930-918 36° WH Phasecut 83mm

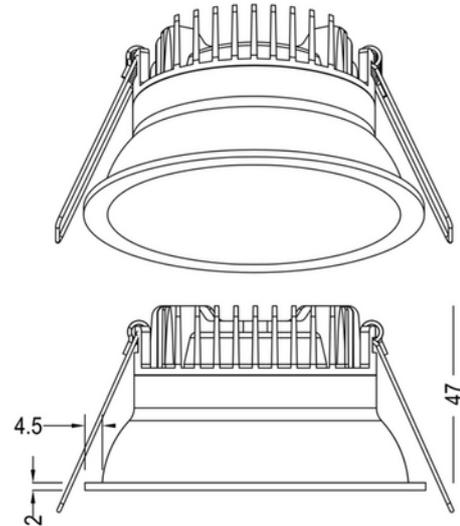

Ceto Mini fixed is a low downlight with 7W effect. With recessed light source, low blending, CRI95 and 36° beam angle, this is the natural choice where you want to create an exclusive and comfortable lighting. Phase-cut driver included.

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	Phase-Cut
Voltage (system) [V]	230V 50Hz
Emergency light (h)	No Emergency light

TECHNICAL DATA	
IK (system)	IK02
IP (system)	IP44
Outdoor	No
Operating temperature (°C)	-20 - 45

**PRODUCT DATA SHEET**

Ceto Mini Fixed 500lm 8W D2W 930-918 36° WH Phasecut 83mm

Art.no: 21927-D2W-36-3

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	63
CRI / Ra (>=)	95
CCT (Color Temperature) (K)	3000-1800K D2W
Preset CCT if switch(Color Temperature) (K)	1800-3000K TW
Color Code	930-918
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
Lifetime (h)	L80: 100 000
MacAdam (SDCM)	3
UGR (<=)	19
Manufacturer (light source)	Sunpu
Manufacture Description (COB)	BXRV-DR-1830H-1000-A-13
Forward Current LED (min-max) (mA)	350 - 420
Forward Voltage LED (max tp=25) (V)	18.8
Driftspenning LED (min tp=65) (V)	15.5

DRIVER	
Manufacturer (driver)	AcTEC
Protection Class (driver)	2
Standby power Psb (W) <	1.0
Flicker metric (Pst LM) <	1.0
Stroboscopic effect metric (SVM) <	0.4
Max Output Voltage (V)	26
Dimming (driver)	Phase-Cut
Dimming Minimum Level (%)	1.0
Dimming Phasecut Type	Leading / Trailing edge
Dimming output type	Amplitude Modulation
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Flicker-free	Yes
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	332 - 367
Current setting (driver)	None

**PRODUCT DATA SHEET**

Ceto Mini Fixed 500lm 8W D2W 930-918 36° WH Phasecut 83mm

Art.no: 21927-D2W-36-3

*Lighting Solutions*

DRIVER	
CC (forward voltage driver) (V)	13.0 - 26.0
CV (driver) [V]	15
Output Current Tolerance (%)	5.0
Current Ripple (%)	5.0
Max load pr circuit - B10	35
Max load pr circuit - B16	182
Max load pr circuit - C10	280
Max load pr circuit - C16	448
Max load pr circuit - C20	560
Max load pr circuit - C25	700
Max load pr circuit - C32	800
Leakage current (mA)	5.0
Inrush current time (µs)	100.0
Inrush current I <sub>max</sub> (A)	5.0

DIMENSIONS	
Width (product) (mm)	90.0
Height (product) (mm)	47.0
Weight (product) (kg)	0.338888888888889
Diameter (product) (mm)	90.0

MATERIALS AND SURFACES	
Color	White
RAL Code	RAL9010
Corrosion Class	C1
Surface treatment	Powdercoated
Housing Material	Aluminium
Housing Material %	47.9
Diffuser Material	Aluminium
Diffuser Material%	1.0
Material 2%	10.6
Material 4%	0.8
Material 5%	0.04
Material 6%	2.4
Material 7%	37.26



## PRODUCT DATA SHEET

Ceto Mini Fixed 500lm 8W D2W 930-918 36° WH Phasecut 83mm  
Art.no: 21927-D2W-36-3



*Lighting Solutions*

INSTALLATION AND CONNECTION	
Areas of use	Generally
Mounting	Recessed
Connection (system)	QuickConnect

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	G
CE mark	Yes
Energy Efficiency Class	A++

## LIGHT DISTRIBUTION

