


**FDV DOCUMENTATION**

Acrux Adjustable 850lm 930 36° 10W WH Phasecut IP54

Art.no: 2302-36-3

*Lighting Solutions*

82-88mm

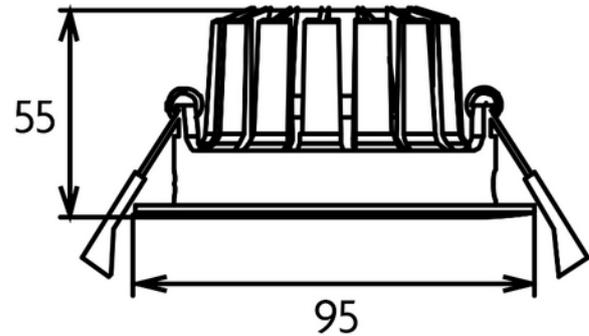

Acrux Adjustable 850lm 930 36° 10W WH Phasecut IP54



SPECIFICATIONS	
Forward Voltage LED (max tp=25) (V)	38.0
Forward Voltage LED (min tp=65) (V)	32.0
CC (forward voltage driver) (V)	40.0
Inrush current time (µs)	300.0
Inrush current I _{max} (A)	5.0
Width (product) (mm)	95.0
Height (product) (mm)	55.0
Weight (product) (kg)	0.4



FDV DOCUMENTATION

Acrux Adjustable 850lm 930 36° 10W WH Phasecut IP54

Art.no: 2302-36-3



Lighting Solutions

LIGHT DISTRIBUTION

