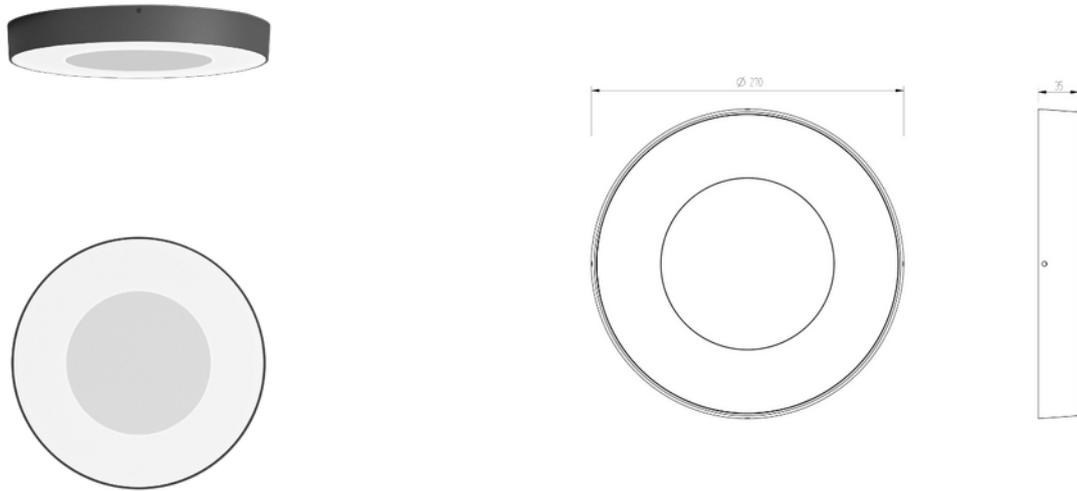


**PRODUCT DATA SHEET**

Canis 2550lm 830 110° 24W Dark Grey

Art.no: 2360-110-7

*Lighting Solutions*

## Canis 2550lm 830 110° 24W Dark Grey

**A**

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK08
IP (system)	IP54
Outdoor	Yes
Operating temperature (°C)	-20 - 50

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	57
CRI / Ra (>=)	80

**PRODUCT DATA SHEET**

Canis 2550lm 830 110° 24W Dark Grey

Art.no: 2360-110-7

*Lighting Solutions*

PHOTOMETRIC DATA	
CCT (Color Temperature) (K)	3000
Color Code	830
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Opal
Forward Voltage LED (max tp=25) (V)	66.0
Driftspenning LED (min tp=65) (V)	60.0

DRIVER	
Protection Class (driver)	2
IP (driver)	IP20
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	350 - null
CC (forward voltage driver) (V)	48.0 - 70.0
Output Current Tolerance (%)	5.0
Current Ripple (%)	140.0
Max load pr circuit - B10	26
Max load pr circuit - B16	42
Max load pr circuit - C10	44
Max load pr circuit - C16	71
Leakage current (mA)	0.5
Inrush current time (µs)	125.0
Inrush current I <sub>max</sub> (A)	10.0

DIMENSIONS	
Width (product) (mm)	270.0
Height (product) (mm)	35.0
Weight (product) (kg)	1.13

INSTALLATION AND CONNECTION	
Areas of use	Generally, Outdoor
Mounting	Surface, Wall, Ceiling
Connection (system)	Terminal



**PRODUCT DATA SHEET**

Canis 2550lm 830 110° 24W Dark Grey

Art.no: 2360-110-7



*Lighting Solutions*

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A

**LIGHT DISTRIBUTION**

