


**FDV DOCUMENTATION**

Tigrus Tilttable 550lm 7W 930 36° WH Phasecut Isosafe
 Art.no: 24930-36-3

*Lighting Solutions*

Tigrus Tilttable 550lm 7W 930 36° WH Phasecut Isosafe

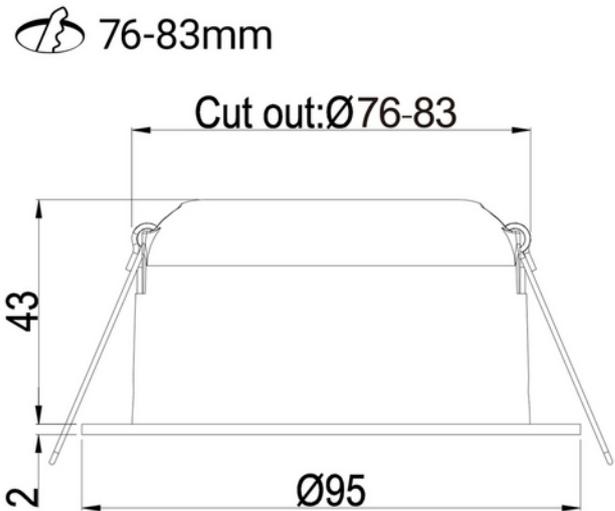

SPECIFICATIONS	
Operating temperature (°C)	45
Forward Voltage LED (max tp=25) (V)	17.5
Forward Voltage LED (min tp=65) (V)	12.0
CC (driver) [mA]	367
CC (forward voltage driver) (V)	26.0
Inrush current time (μs)	100.0
Inrush current I_{max} (A)	5.0
Width (product) (mm)	95.0
Height (product) (mm)	45.0
Weight (product) (kg)	0.3694444444444444
Diameter (product) (mm)	95.0



FDV DOCUMENTATION

Tigrus Tilttable 550lm 7W 930 36° WH Phasecut Isosafe

Art.no: 24930-36-3



Lighting Solutions

LIGHT DISTRIBUTION

