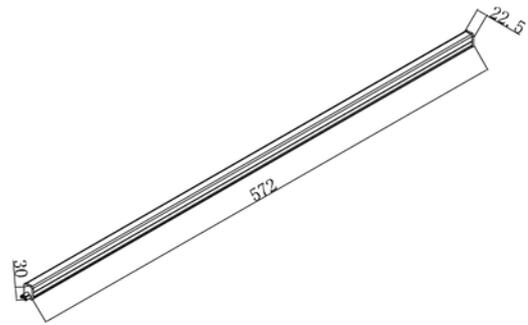



**PRODUCT DATA SHEET**

Exilis II 100lm/w 830 10W 572mm Opal Alu dimmable

Art.no: 2510-01-3

*Lighting Solutions*

## Exilis II 100lm/w 830 10W 572mm Opal Alu dimmable



Our LED tube luminaire with a built in LED driver makes installation a breeze. The Exilis II comes in a variety of lengths that can be easily be connected together without the use of tools, just by clicking the LED tubes together. The different lengths makes it very easy to make a continuous line of light regardless of the length of the surface. The Exilis II comes with a opal diffuser and phasecut dim.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	Phase-Cut
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No
Operating temperature (°C)	-20 - 40

**PRODUCT DATA SHEET**

Exilis II 100lm/w 830 10W 572mm Opal Alu dimmable

Art.no: 2510-01-3

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	110
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Socket / Cap-Base	N/A
Lens (Diffuser)	Opal
Lifetime (h)	L80B10: 100 000

DRIVER	
Dimming Phasecut Type	Leading edge
Max load pr circuit - B10	32
Max load pr circuit - B16	52
Max load pr circuit - C10	32
Max load pr circuit - C16	52
Leakage current (mA)	0.5
Inrush current I <sub>max</sub> (A)	0.15

DIMENSIONS	
Length (product) (mm)	572.0
Width (product) (mm)	22.0
Height (product) (mm)	30.0

MATERIALS AND SURFACES	
Color	Aluminium

INSTALLATION AND CONNECTION	
Areas of use	Cottage, Kitchen, Residence
Connection (system)	Exilis II 3-pin Connector

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A



## PRODUCT DATA SHEET

Exilis II 100lm/w 830 10W 572mm Opal Alu dimmable

Art.no: 2510-01-3



*Lighting Solutions*

## LIGHT DISTRIBUTION

