




FDV DOCUMENTATION

Tigrus 360° Square 550lm 8W D2W 930-918 36° BK Phasecut Iso
Art.no: 26927-D2W-36-2



Lighting Solutions

80-83mm

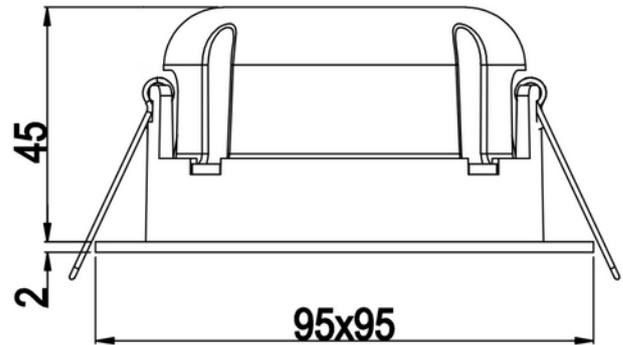

Tigrus 360° Square 550lm 8W D2W 930-918 36° BK Phasecut Iso



SPECIFICATIONS	
Operating temperature (°C)	45
Forward Voltage LED (max tp=25) (V)	18.8
Forward Voltage LED (min tp=65) (V)	15.5
CC (driver) [mA]	367
CC (forward voltage driver) (V)	26.0
Inrush current time (µs)	100.0
Inrush current I _{max} (A)	5.0
Length (product) (mm)	47.0
Width (product) (mm)	95.0
Height (product) (mm)	47.0
Weight (product) (kg)	0.4111111111111111



FDV DOCUMENTATION

Tigrus 360° Square 550lm 8W D2W 930-918 36° BK Phasecut Iso

Art.no: 26927-D2W-36-2



Lighting Solutions

LIGHT DISTRIBUTION

