
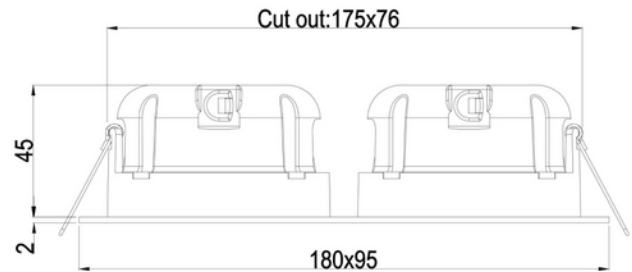


**PRODUCT DATA SHEET**

Tigrus 360° Square Double 1100lm 16W D2W 930-918 36° BK Phas
 Art.no: 27927-D2W-36-2

*Lighting Solutions*
 175x76mm


Tigrus 360° Square Double 1100lm 16W D2W 930-918 36° BK Phas



Tigrus Square Double 360° Rotatable can be mounted directly in insulation. Downlight have CRI>95 and are delivered with 2700K or Dim2Warm. The downlight can be tilted 25° and it's 360° rotatable. The luminaire connects easily without using a screwdriver. Cut-out 175x76mm.

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	Phase-Cut
Voltage (system) [V]	230V 50Hz
Emergency light (h)	No Emergency light

TECHNICAL DATA	
IK (system)	IK02
IP (system)	IP44
IP Front/Back (system)	IP40/20

**PRODUCT DATA SHEET**

Tigrus 360° Square Double 1100lm 16W D2W 930-918 36° BK Phas

Art.no: 27927-D2W-36-2

*Lighting Solutions*

TECHNICAL DATA	
Outdoor	No
Operating temperature (°C)	-20 - 45

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	69
CRI / Ra (>=)	95
CCT (Color Temperature) (K)	1800-3000K TW
Preset CCT if switch(Color Temperature) (K)	1800-3000K TW
Color Code	930-918
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
Lifetime (h)	L80: 100 000
MacAdam (SDCM)	3
UGR (<=)	23
Manufacturer (light source)	Sunpu
Manufacture Description (COB)	BXRV-DR-1830H-1000-A-13
Forward Current LED (min-max) (mA)	200 - 450
Forward Voltage LED (max tp=25) (V)	17.5
Driftspenning LED (min tp=65) (V)	12.0

DRIVER	
Manufacturer (driver)	AcTEC
Protection Class (driver)	2
Standby power P _{sb} (W) <	0.5
Flicker metric (P _{st} LM) <	1.0
Stroboscopic effect metric (SVM) <	0.4
Max Output Voltage (V)	26
Dimming (driver)	None
Dimming Minimum Level (%)	1.0
Dimming Phasecut Type	Leading / Trailing edge
Dimming output type	Amplitude Modulation
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Flicker-free	Yes

**PRODUCT DATA SHEET**

Tigrus 360° Square Double 1100lm 16W D2W 930-918 36° BK Phas

Art.no: 27927-D2W-36-2

*Lighting Solutions*

DRIVER	
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	665 - 735
Current setting (driver)	None
CC (forward voltage driver) (V)	13.0 - 26.0
CV (driver) [V]	15
Output Current Tolerance (%)	5.0
Current Ripple (%)	5.0
Max load pr circuit - B10	91
Max load pr circuit - B16	145
Max load pr circuit - C10	91
Max load pr circuit - C16	145
Max load pr circuit - C20	182
Max load pr circuit - C25	227
Max load pr circuit - C32	288
Leakage current (mA)	5.0
Inrush current time (μ s)	100.0
Inrush current I _{max} (A)	5.0

DIMENSIONS	
Length (product) (mm)	180.0
Width (product) (mm)	95.0
Height (product) (mm)	47.0
Weight (product) (kg)	0.688888888888889

MATERIALS AND SURFACES	
Color	Black
RAL Code	RAL9005
Corrosion Class	C1
Housing Material	Aluminium
Diffuser Material	Aluminium

INSTALLATION AND CONNECTION	
Areas of use	Generally
Mounting	Recessed
Connection (system)	QuickConnect



PRODUCT DATA SHEET

Tigrus 360° Square Double 1100lm 16W D2W 930-918 36° BK Phas
Art.no: 27927-D2W-36-2



Lighting Solutions

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	G
CE mark	Yes
Energy Efficiency Class	A

LIGHT DISTRIBUTION

