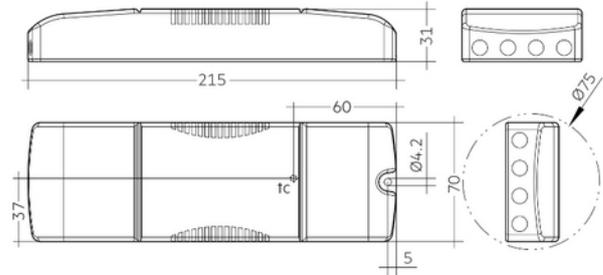


**PRODUCT DATA SHEET**

CBU Driver 350-1050mA cc 38W Bluetooth bDW SR TW 2-ch
 Art.no: 28002584

*Lighting Solutions*

CBU Driver 350-1050mA cc 38W Bluetooth bDW SR TW 2-ch

DRIVER	
Manufacturer (driver)	Tridonic
Protection Class (driver)	1 or 2
Max Output Voltage (V)	60
Dimming (driver)	Casambi, CLO
IP (driver)	IP20
Expected Lifetime (driver) (h)	100000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	350 - 1050
Current setting (driver)	CLO, I-Select 2 Plug (Tridonic)
CC (forward voltage driver) (V)	20.0 - 50.0
Output Current Tolerance (%)	3.0
Current Ripple (%)	2.0
Max load pr circuit - B10	10
Max load pr circuit - B16	16
Max load pr circuit - C10	16
Max load pr circuit - C16	26



PRODUCT DATA SHEET

CBU Driver 350-1050mA cc 38W Bluetooth bDW SR TW 2-ch
Art.no: 28002584



Lighting Solutions

DRIVER	
Leakage current (mA)	0.5
Inrush current time (μ s)	224.0
Inrush current I _{max} (A)	26.0