
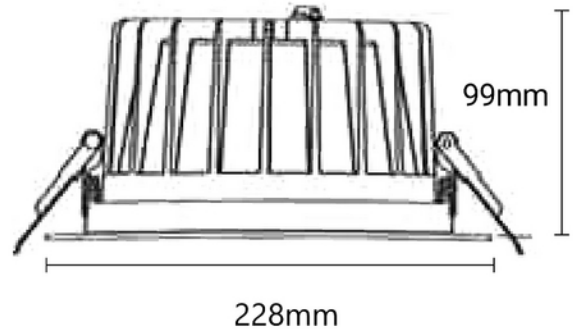


**PRODUCT DATA SHEET**

Polaris 2500lm 830 60° 25W WH cut out 200-210mm w/o driver  
 Art.no: 3001-60-3

*Lighting Solutions*
 200-210mm


## Polaris 2500lm 830 60° 25W WH cut out 200-210mm w/o driver



This luminaire has quickly become a very popular downlight for general lighting. The Polaris is designed with a precise reflector, ensuring a high lumen value without glare. Polaris is delivered without driver. See accessories for correct driver.

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	Depending on Driver
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP54
Outdoor	Yes

**PRODUCT DATA SHEET**

Polaris 2500lm 830 60° 25W WH cut out 200-210mm w/o driver  
Art.no: 3001-60-3



*Lighting Solutions*

PHOTOMETRIC DATA	
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
UGR (<=)	19
Manufacturer (light source)	Citizen
Forward Voltage LED (max tp=25) (V)	40.0
Driftspenning LED (min tp=65) (V)	28.0

DIMENSIONS	
Length (product) (mm)	228.0
Width (product) (mm)	228.0
Height (product) (mm)	99.0
Weight (product) (kg)	1.14

MATERIALS AND SURFACES	
Color	White

INSTALLATION AND CONNECTION	
Mounting	Recessed, Ceiling
Connection (system)	Depending on driver

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	E
CE mark	Yes
Energy Efficiency Class	A++ - A



**PRODUCT DATA SHEET**

Polaris 2500lm 830 60° 25W WH cut out 200-210mm w/o driver

Art.no: 3001-60-3



*Lighting Solutions*

**LIGHT DISTRIBUTION**

