


**PRODUCT DATA SHEET**

Syrma 3750lm 830/840/857 120° 45W WH  
Art.no: 3015-120-3



*Lighting Solutions*

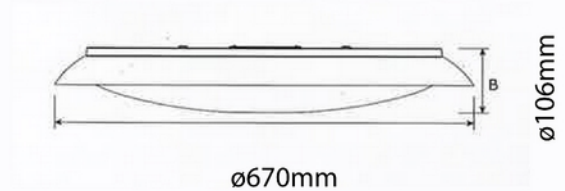

## Syrma 3750lm 830/840/857 120° 45W WH



ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	83
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3/4/5700
Color Code	830/840/857

**PRODUCT DATA SHEET**

Syrma 3750lm 830/840/857 120° 45W WH

Art.no: 3015-120-3

*Lighting Solutions*

PHOTOMETRIC DATA	
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Opal
Lifetime (h)	L80B50: 50 000
MacAdam (SDCM)	3
Manufacturer (light source)	Everlight

DRIVER	
Dimming (driver)	None
Output Current Tolerance (%)	5.0
Current Ripple (%)	5.0
Max load pr circuit - B10	27
Max load pr circuit - B16	43
Max load pr circuit - C10	27
Max load pr circuit - C16	43
Inrush current time ( $\mu$ s)	45.0
Inrush current I <sub>max</sub> (A)	85.0

DIMENSIONS	
Width (product) (mm)	670.0
Height (product) (mm)	106.0
Weight (product) (kg)	2.8

MATERIALS AND SURFACES	
Color	White

INSTALLATION AND CONNECTION	
Areas of use	Generally, Hotel
Mounting	Surface, Ceiling

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A