


**PRODUCT DATA SHEET**

Seta Double Frame 2x3750lm 930 2x30° 2x30W WH18i3
 Art.no: 30245-7-230-3

*Lighting Solutions*

 165x295mm

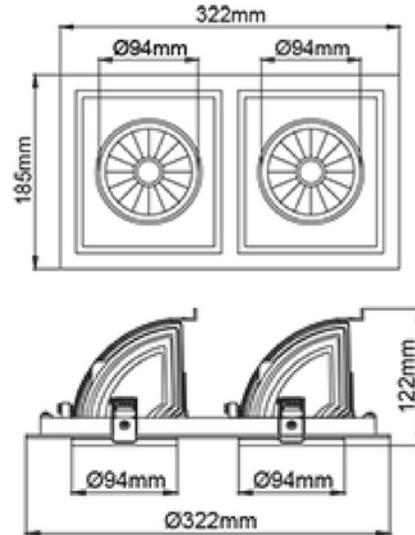

Seta Double Frame 2x3750lm 930 2x30° 2x30W WH18i3



Seta Double is the clear choice when one wants recessed spot lighting. This favorite can be found in stores throughout the Nordic region. Thanks to large adjustment possibilities Seta Double is without doubt one of the best in its class. Seta Double has 18i3 connector and can be supplied with a variety of connector options. The luminaire is available in three different colors.

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

**PRODUCT DATA SHEET**

Seta Double Frame 2x3750lm 930 2x30° 2x30W WH18i3

Art.no: 30245-7-230-3

*Lighting Solutions*

PHOTOMETRIC DATA	
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	3000
Color Code	930
Lightsource Type	LED (built in)
Lens (Diffuser)	Clear
MacAdam (SDCM)	3
Manufacturer (light source)	Tridonic
Forward Current LED (min-max) (mA)	350 - 1400
Forward Voltage LED (max tp=25) (V)	39.2
Driftspenning LED (min tp=65) (V)	30.6

DRIVER	
Manufacturer (driver)	Tridonic
Protection Class (driver)	1 or 2
Max Output Voltage (V)	60
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	800 - null
CC (forward voltage driver) (V)	25.0 - 45.0
Output Current Tolerance (%)	7.5
Current Ripple (%)	5.0
Max load pr circuit - B10	14
Max load pr circuit - B16	24
Max load pr circuit - C10	24
Max load pr circuit - C16	40
Inrush current time (μ s)	150.0
Inrush current I _{max} (A)	25.0

DIMENSIONS	
Length (product) (mm)	323.0
Width (product) (mm)	186.0
Height (product) (mm)	120.0

**PRODUCT DATA SHEET**

Seta Double Frame 2x3750lm 930 2x30° 2x30W WH18i3

Art.no: 30245-7-230-3

*Lighting Solutions***MATERIALS AND SURFACES**

Color	White
-------	-------

INSTALLATION AND CONNECTION

Areas of use	Shop, Showroom
Mounting	Recessed, Ceiling
Connection (system)	18i3 Quick connection

ENERGY AND CERTIFICATIONS

CE mark	Yes
Energy Efficiency Class	A++ - A

ALTERNATIVE DRIVERS

Current Setting (mA) ?	800
------------------------	-----