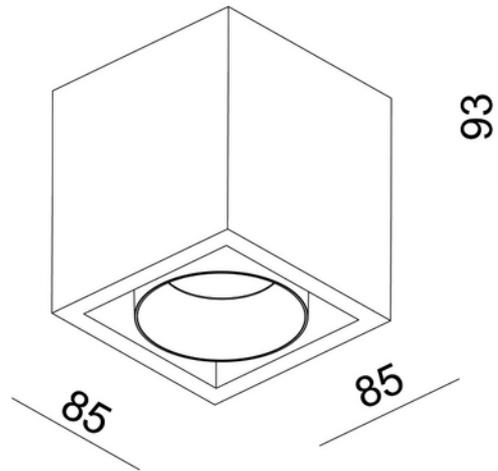


**PRODUCT DATA SHEET**

Kappa 975lm 927 8,9W 48° WH/GOLD DALI

Art.no: 3500-48-6-ddd

*Lighting Solutions*

Kappa 975lm 927 8,9W 48° WH/GOLD DALI



Kappa hvit med Gull front ring.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	DALI
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	107
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	2700

**PRODUCT DATA SHEET**

Kappa 975lm 927 8,9W 48° WH/GOLD DALI

Art.no: 3500-48-6-ddd

*Lighting Solutions*

PHOTOMETRIC DATA	
Color Code	927
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
MacAdam (SDCM)	3
Manufacturer (light source)	Bridgelux

DRIVER	
Manufacturer (driver)	AcTEC
Protection Class (driver)	2
Max Output Voltage (V)	18
Dimming (driver)	DALI2
IP (driver)	IP20
Expected Lifetime (driver) (h)	30000
CC (driver) [mA]	500 - null
CC (forward voltage driver) (V)	9.0 - 18.0
Output Current Tolerance (%)	5.0
Current Ripple (%)	5.0
Max load pr circuit - B10	35
Max load pr circuit - B16	56
Max load pr circuit - C10	74
Max load pr circuit - C16	118
Leakage current (mA)	5.0
Inrush current time (µs)	300.0
Inrush current I _{max} (A)	5.0

DIMENSIONS	
Length (product) (mm)	85.0
Width (product) (mm)	85.0
Height (product) (mm)	93.0

INSTALLATION AND CONNECTION	
Areas of use	Cottage, Generally, Hotel, Kitchen, Residence, Restaurant
Mounting	Surface, Ceiling
Connection (system)	Terminal



PRODUCT DATA SHEET

Kappa 975lm 927 8,9W 48° WH/GOLD DALI

Art.no: 3500-48-6-ddd



Lighting Solutions

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A

LIGHT DISTRIBUTION

