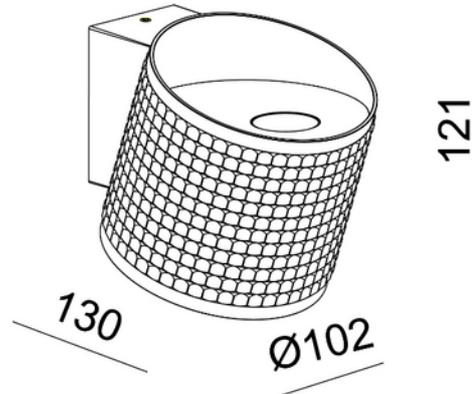


**PRODUCT DATA SHEET**

Apollo plus 2x400lm 927 2x4,6W Black/Gold Phasecut

Art.no: 3534-26

*Lighting Solutions*

Apollo plus 2x400lm 927 2x4,6W Black/Gold Phasecut



| ELECTRICAL DATA | |
|---------------------------|-----------|
| Protection Class (system) | 1 |
| Dimming (system) | Phase-Cut |
| Voltage (system) [V] | 230V 50Hz |

| TECHNICAL DATA | |
|----------------|------|
| IK (system) | IK02 |
| IP (system) | IP43 |
| Outdoor | No |

| PHOTOMETRIC DATA | |
|-----------------------------|------|
| Efficacy (system) (lm/W) | 65 |
| CRI / Ra (>=) | 90 |
| CCT (Color Temperature) (K) | 2700 |

**PRODUCT DATA SHEET**

Apollo plus 2x400lm 927 2x4,6W Black/Gold Phasecut

Art.no: 3534-26

*Lighting Solutions*

| PHOTOMETRIC DATA | |
|-----------------------------|----------------|
| Color Code | 927 |
| Lightsource Type | LED (built in) |
| Lens (Diffuser) | Clear |
| Manufacturer (light source) | Bridgelux |

| DRIVER | |
|-----------------------|-------|
| Manufacturer (driver) | AcTEC |

| DIMENSIONS | |
|-----------------------|-------|
| Length (product) (mm) | 130.0 |
| Width (product) (mm) | 102.0 |
| Height (product) (mm) | 121.0 |
| Weight (product) (kg) | 0.5 |

| MATERIALS AND SURFACES | |
|------------------------|------------|
| Color | Black/Gold |

| INSTALLATION AND CONNECTION | |
|-----------------------------|--------------------------------------|
| Areas of use | Cottage, Generally, Hotel, Residence |
| Mounting | Surface, Wall |
| Connection (system) | Terminal |

| ENERGY AND CERTIFICATIONS | |
|---------------------------|---------|
| CE mark | Yes |
| Energy Efficiency Class | A++ - A |



PRODUCT DATA SHEET

Apollo plus 2x400lm 927 2x4,6W Black/Gold Phasecut

Art.no: 3534-26



Lighting Solutions

LIGHT DISTRIBUTION

