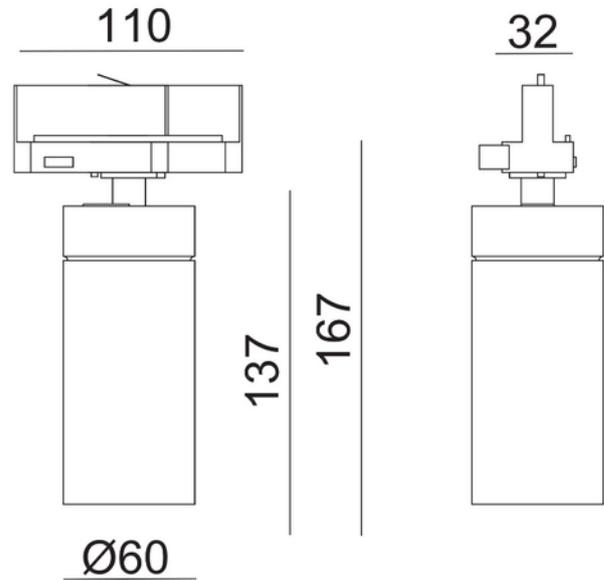


**PRODUCT DATA SHEET**

Tania Mini 1550lm 930 36° 14,5W 3-circuit BK DALI

Art.no: 3550-2-36-2-ddd

*Lighting Solutions*

## Tania Mini 1550lm 930 36° 14,5W 3-circuit BK DALI



Tania Mini DALI2 is a small spotlight in a contemporary design. Perfect for use at home and in other commercial settings. Front ring is sold separately. This version is with LED COB and no changeable lightbulb.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	DALI2
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No
Operating temperature (°C)	-20 - 40

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	94

**PRODUCT DATA SHEET**

Tania Mini 1550lm 930 36° 14,5W 3-circuit BK DALI

Art.no: 3550-2-36-2-ddd

*Lighting Solutions*

PHOTOMETRIC DATA	
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	3000
Color Code	930
Lightsource Type	LED (built in)
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
UGR (<=)	10
Manufacturer (light source)	Bridgelux

DRIVER	
Flicker-free	Yes

DIMENSIONS	
Length (product) (mm)	167.0
Weight (product) (kg)	0.5
Diameter (product) (mm)	60.0

MATERIALS AND SURFACES	
Color	Black
Housing Material	Aluminium

INSTALLATION AND CONNECTION	
Areas of use	Cafe, Cottage, Generally, Hotel, Residence, Shop, Showroom
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit+dim

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	E
CE mark	Yes
EPD number	NEPD-14536-15051
Energy Efficiency Class	A++ - A



**PRODUCT DATA SHEET**

Tania Mini 1550lm 930 36° 14,5W 3-circuit BK DALI

Art.no: 3550-2-36-2-ddd



*Lighting Solutions*

**LIGHT DISTRIBUTION**

