


**PRODUCT DATA SHEET**

Tania Mini 1450lm 927 36° 14,5W 3-cir Brushed Brass phase  
 Art.no: 3551-3-36-21

*Lighting Solutions*

## Tania Mini 1450lm 927 36° 14,5W 3-cir Brushed Brass phase

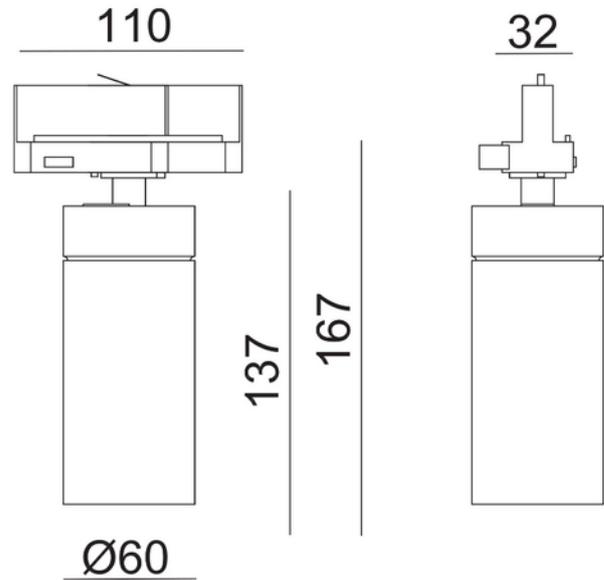

Tania Mini is a small spotlight in a contemporary design. Perfect for use at home and in other commercial settings. Front ring is sold separately. This version is with LED COB and no changeable lightbulb.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	Phase-Cut
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No
Operating temperature (°C)	-20 - 40

PHOTOMETRIC DATA	
CRI / Ra (>=)	90

**PRODUCT DATA SHEET**

Tania Mini 1450lm 927 36° 14,5W 3-cir Brushed Brass phase  
Art.no: 3551-3-36-21



*Lighting Solutions*

PHOTOMETRIC DATA	
CCT (Color Temperature) (K)	2700
Color Code	927
Lightsource Type	LED (built in)
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
Manufacturer (light source)	Bridgelux

DRIVER	
Manufacturer (driver)	AcTEC
Flicker-free	Yes
Max load pr circuit - B10	125
Max load pr circuit - B16	200
Max load pr circuit - C10	125
Max load pr circuit - C16	200

DIMENSIONS	
Length (product) (mm)	147.0
Diameter (product) (mm)	60.0

MATERIALS AND SURFACES	
Color	Brushed Brass
Housing Material	Aluminium

INSTALLATION AND CONNECTION	
Areas of use	Cafe, Cottage, Generally, Hotel, Residence, Shop, Showroom
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit

ENERGY AND CERTIFICATIONS	
CE mark	Yes
EPD number	NEPD-14536-15051
Energy Efficiency Class	A++ - A



**PRODUCT DATA SHEET**

Tania Mini 1450lm 927 36° 14,5W 3-cir Brushed Brass phase

Art.no: 3551-3-36-21



*Lighting Solutions*