


**PRODUCT DATA SHEET**

Tania Mini 1450lm 927 36° 14,5W 1-circuit BK phasecut
Art.no: 3553-3-36-2



Lighting Solutions

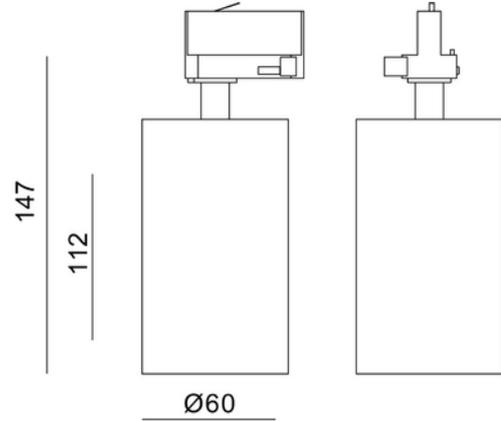

Tania Mini 1450lm 927 36° 14,5W 1-circuit BK phasecut



Tania Mini is a small spotlight in a contemporary design. Perfect for use at home and in other commercial settings. Choose between 1 or 3-circuit connection. Front ring is sold separately. This version is with LED COB and no changeable lightbulb.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	Phase-Cut
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No
Operating temperature (°C)	-20 - 40

**PRODUCT DATA SHEET**

Tania Mini 1450lm 927 36° 14,5W 1-circuit BK phasecut
Art.no: 3553-3-36-2



Lighting Solutions

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	73
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	2700
Color Code	927
Lightsource Type	LED (built in)
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
Manufacturer (light source)	Bridgelux

DRIVER	
Manufacturer (driver)	AcTEC
Protection Class (driver)	2
Max Output Voltage (V)	50
Dimming (driver)	Phase-Cut
Dimming Minimum Level (%)	1.0
Dimming Phasecut Type	Leading / Trailing edge
IP (driver)	IP65
Expected Lifetime (driver) (h)	50000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	350 - null
CC (forward voltage driver) (V)	18.0 - 37.0
Output Current Tolerance (%)	5.0
Max load pr circuit - B10	125
Max load pr circuit - B16	200
Max load pr circuit - C10	125
Max load pr circuit - C16	200
Inrush current time (µs)	100.0
Inrush current I _{max} (A)	5.0

DIMENSIONS	
Width (product) (mm)	60.0
Height (product) (mm)	147.0



PRODUCT DATA SHEET

Tania Mini 1450lm 927 36° 14,5W 1-circuit BK phasecut
Art.no: 3553-3-36-2



Lighting Solutions

MATERIALS AND SURFACES	
Color	Black
Housing Material	Aluminium

INSTALLATION AND CONNECTION	
Areas of use	Cafe, Cottage, Generally, Hotel, Residence, Shop, Showroom
Mounting	Track, Ceiling
Connection (system)	Track 1-Circuit

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A

LIGHT DISTRIBUTION

