


**FDV DOCUMENTATION**

Tania Mini Basic 1550lm 930 18° 14,5W BK Downlight phasecut
 Art.no: 3560-18-2

*Lighting Solutions*

Tania Mini Basic 1550lm 930 18° 14,5W BK Downlight phasecut

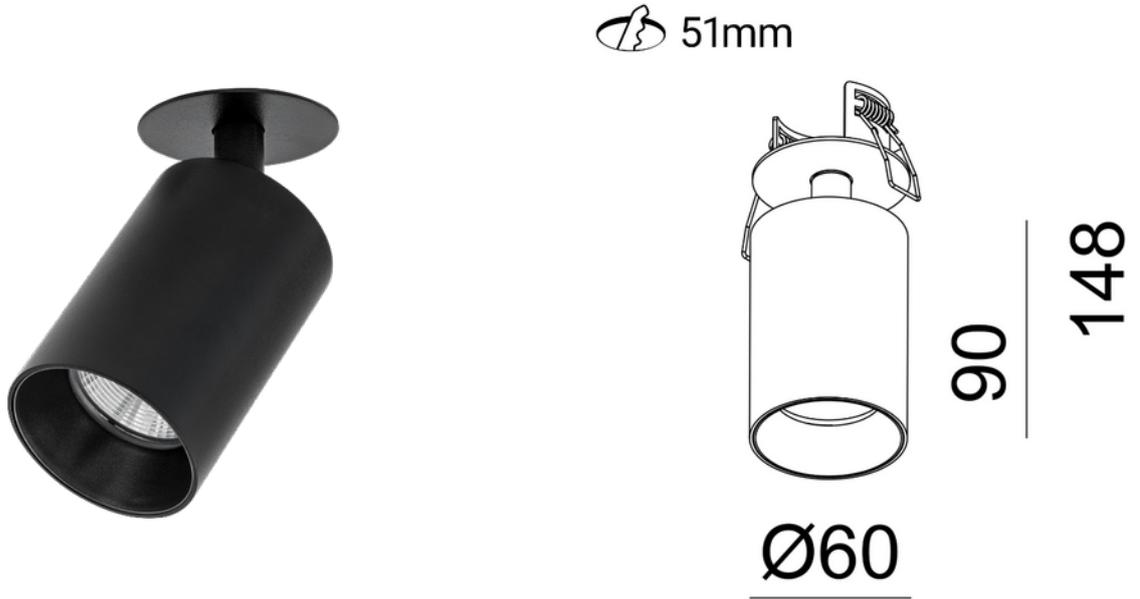

SPECIFICATIONS	
Operating temperature (°C)	40
CC (forward voltage driver) (V)	52.0
Inrush current time (µs)	300.0
Inrush current I _{max} (A)	5.0
Length (product) (mm)	148.0
Width (product) (mm)	60.0
Diameter (product) (mm)	60.0



FDV DOCUMENTATION

Tania Mini Basic 1550lm 930 18° 14,5W BK Downlight phasecut

Art.no: 3560-18-2



Lighting Solutions

LIGHT DISTRIBUTION

