


**PRODUCT DATA SHEET**

Tania Mini Basic 1550lm 930 18° 14,5W BK Downlight phasecut
 Art.no: 3560-18-2

*Lighting Solutions*
 51mm


Tania Mini Basic 1550lm 930 18° 14,5W BK Downlight phasecut

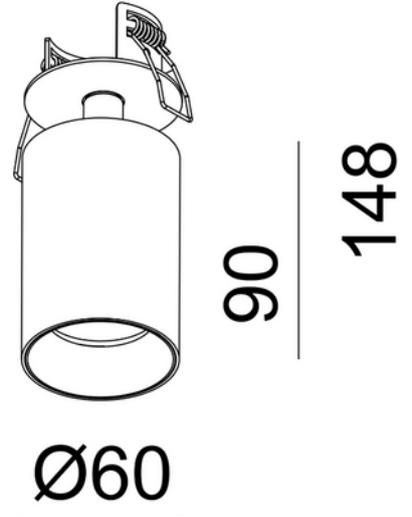

Tania Basic is a recessed spotlight that can be tilted and rotated. Available in white and black color. Gold frontring can be bought separately.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	Phase-Cut
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No
Operating temperature (°C)	-20 - 40

**PRODUCT DATA SHEET**

Tania Mini Basic 1550lm 930 18° 14,5W BK Downlight phasecut
Art.no: 3560-18-2



Lighting Solutions

PHOTOMETRIC DATA	
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	3000
Color Code	930
Lightsource Type	LED (built in)
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 55 000
Manufacturer (light source)	Bridgelux

DRIVER	
Manufacturer (driver)	AcTEC
Protection Class (driver)	2
Max Output Voltage (V)	60
Dimming (driver)	Phase-Cut
Dimming Minimum Level (%)	1.0
Dimming Phasecut Type	Leading / Trailing edge
IP (driver)	IP20
Expected Lifetime (driver) (h)	30000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	350 - null
CC (forward voltage driver) (V)	26.0 - 52.0
Output Current Tolerance (%)	5.0
Current Ripple (%)	50.0
Max load pr circuit - B10	35
Max load pr circuit - B16	56
Max load pr circuit - C10	74
Max load pr circuit - C16	118
Leakage current (mA)	0.7
Inrush current time (µs)	300.0
Inrush current I _{max} (A)	5.0

DIMENSIONS	
Length (product) (mm)	148.0
Width (product) (mm)	60.0
Diameter (product) (mm)	60.0

**PRODUCT DATA SHEET**

Tania Mini Basic 1550lm 930 18° 14,5W BK Downlight phasecut
Art.no: 3560-18-2



Lighting Solutions

MATERIALS AND SURFACES	
Color	Black
Housing Material	Aluminium

INSTALLATION AND CONNECTION	
Areas of use	Cafe, Cottage, Generally, Hotel, Residence, Shop, Showroom
Mounting	Recessed, Ceiling
Connection (system)	Terminal

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A

LIGHT DISTRIBUTION