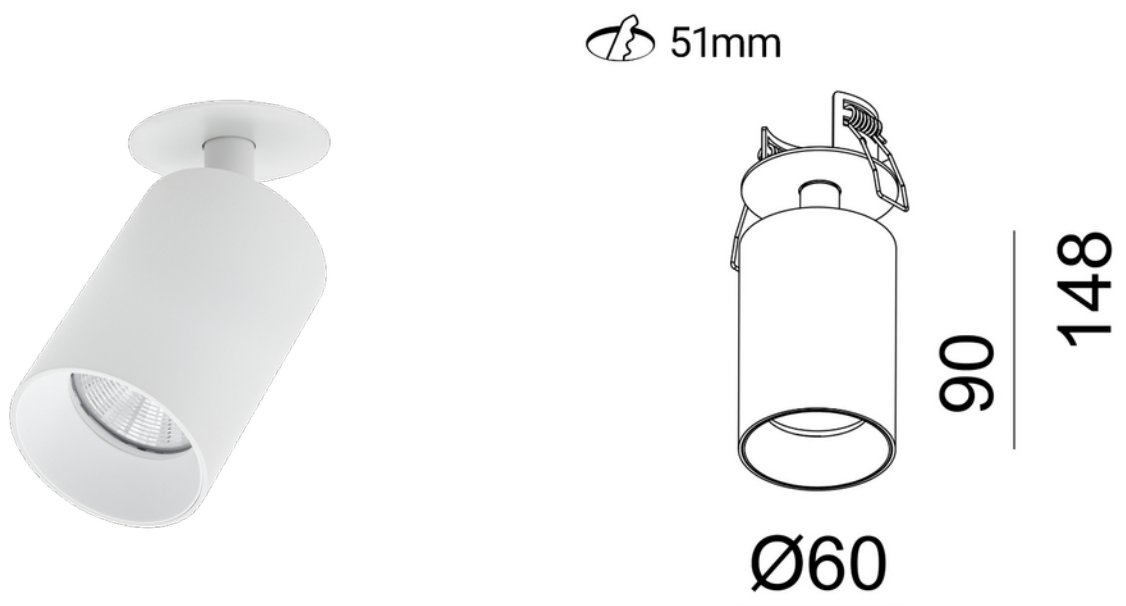


**FDV DOCUMENTATION**

Tania Mini Basic 1550lm 930 18° 14,5W WH Downlight phasecut

Art.no: 3560-18-3

*Lighting Solutions*

## Tania Mini Basic 1550lm 930 18° 14,5W WH Downlight phasecut



| SPECIFICATIONS                      |       |
|-------------------------------------|-------|
| Operating temperature (°C)          | 40    |
| CC (forward voltage driver) (V)     | 52.0  |
| Inrush current time (µs)            | 300.0 |
| Inrush current I <sub>max</sub> (A) | 5.0   |
| Length (product) (mm)               | 90.0  |
| Width (product) (mm)                | 60.0  |
| Diameter (product) (mm)             | 60.0  |



## FDV DOCUMENTATION

Tania Mini Basic 1550lm 930 18° 14,5W WH Downlight phasecut  
Art.no: 3560-18-3



*Lighting Solutions*

## LIGHT DISTRIBUTION

