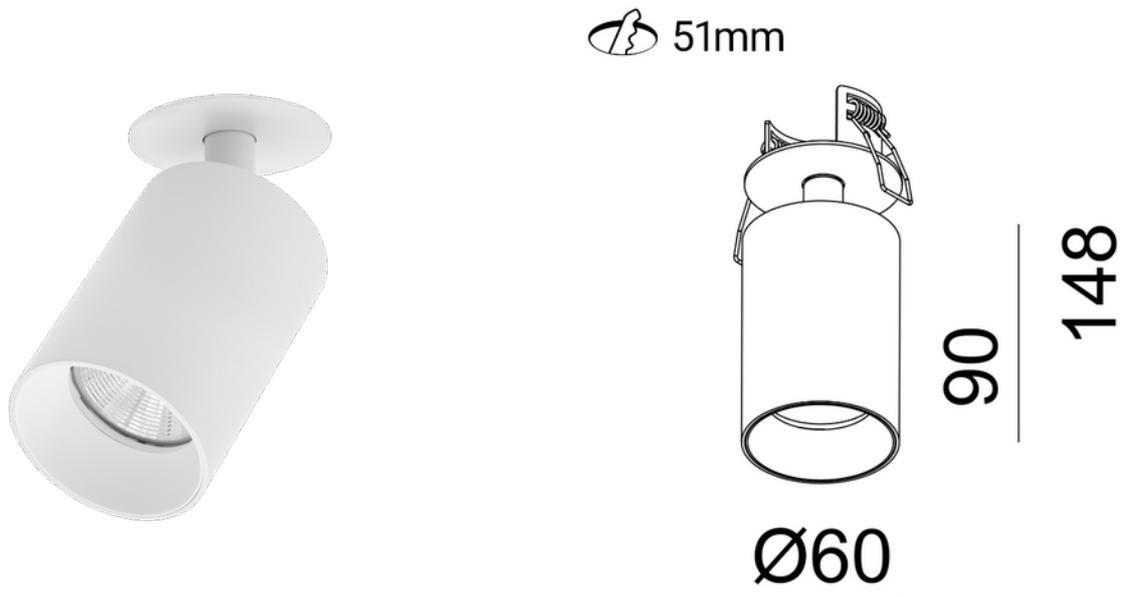


**FDV DOCUMENTATION**

Tania Mini Basic 1550lm 930 18° 14,5W WH Downlight phasecut

Art.no: 3560-2-18-3

*Lighting Solutions*

## Tania Mini Basic 1550lm 930 18° 14,5W WH Downlight phasecut



SPECIFICATIONS	
Operating temperature (°C)	40
CC (forward voltage driver) (V)	52.0
Inrush current time (µs)	300.0
Inrush current I <sub>max</sub> (A)	5.0
Length (product) (mm)	90.0
Width (product) (mm)	60.0
Diameter (product) (mm)	60.0



**FDV DOCUMENTATION**

Tania Mini Basic 1550lm 930 18° 14,5W WH Downlight phasecut

Art.no: 3560-2-18-3



*Lighting Solutions*

**LIGHT DISTRIBUTION**

