


**PRODUCT DATA SHEET**

Tania Mini Basic 1550lm 930 18° 14,5W BK Downlight phasecut
 Art.no: 3560-3-18-2

*Lighting Solutions*

Tania Mini Basic 1550lm 930 18° 14,5W BK Downlight phasecut

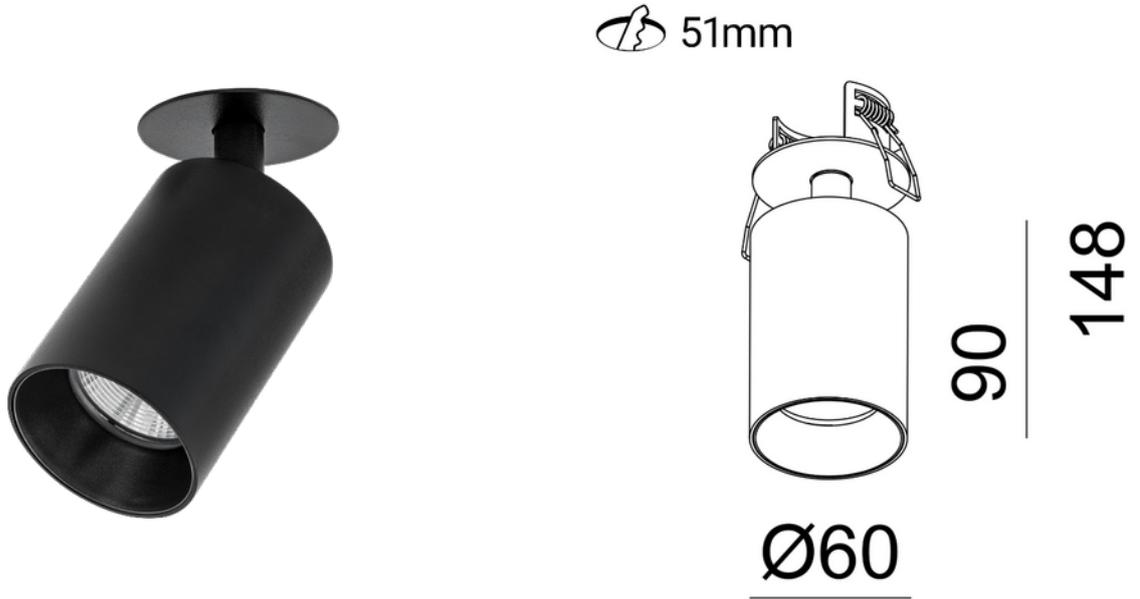

Tania Basic is a recessed spotlight that can be tilted and rotated. Available in white and black color. Gold frontring can be bought seperately.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	Phase-Cut
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No
Operating temperature (°C)	-20 - 40

**PRODUCT DATA SHEET**

Tania Mini Basic 1550lm 930 18° 14,5W BK Downlight phasecut

Art.no: 3560-3-18-2

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	101
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	3000
Color Code	930
Lightsource Type	LED (built in)
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 100 000
Manufacturer (light source)	Bridgelux

DRIVER	
Flicker-free	Yes

DIMENSIONS	
Length (product) (mm)	90.0
Diameter (product) (mm)	60.0

MATERIALS AND SURFACES	
Color	Black
Housing Material	Aluminium

INSTALLATION AND CONNECTION	
Areas of use	Cafe, Cottage, Generally, Hotel, Residence, Shop, Showroom
Mounting	Recessed, Ceiling
Connection (system)	Terminal

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A



PRODUCT DATA SHEET

Tania Mini Basic 1550lm 930 18° 14,5W BK Downlight phasecut

Art.no: 3560-3-18-2



Lighting Solutions

LIGHT DISTRIBUTION

