
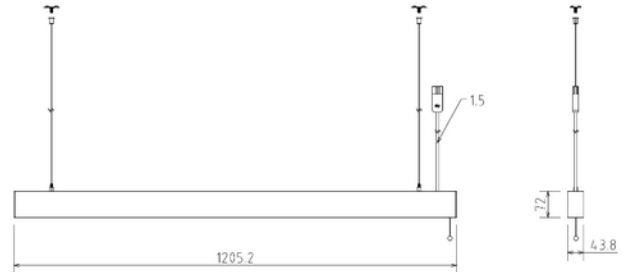


**PRODUCT DATA SHEET**

Benu 5400lm 940 110°/75° 50W BK Pull Switchdim 18i3 3m cable  
 Art.no: 3733-110-2

*Lighting Solutions*

## Benu 5400lm 940 110°/75° 50W BK Pull Switchdim 18i3 3m cable

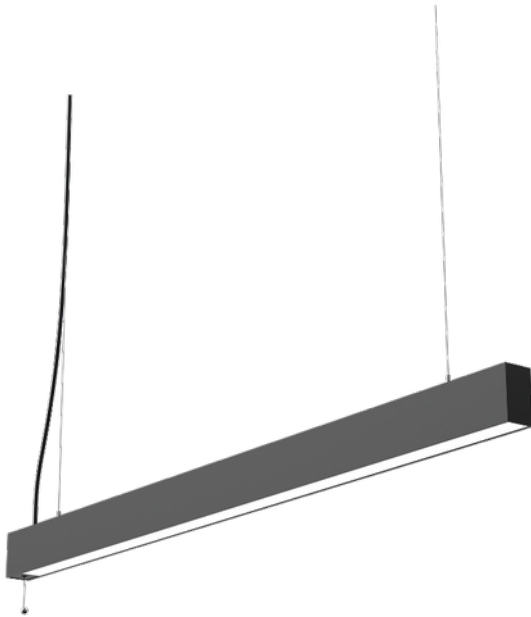

Benu is a linear LED luminaire with up- and down light for pending down in indoor areas. UGR<19 and dimmable by pulling the rope. 18i3 connection, 1500mm wire and t-profile bracket are included.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	DALI2
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK02
IP (system)	IP20
Outdoor	No
Operating temperature (°C)	-25 - 45

**PRODUCT DATA SHEET**

Benu 5400lm 940 110°/75° 50W BK Pull Switchdim 18i3 3m cable  
 Art.no: 3733-110-2

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	108
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	4000
Color Code	940
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Micropris.
Lifetime (h)	L80: 100 000
MacAdam (SDCM)	3
UGR (<=)	19
Manufacturer (light source)	Edison
Forward Current LED (min-max) (mA)	200 - null
Forward Voltage LED (max tp=25) (V)	3.3
Driftspenning LED (min tp=65) (V)	2.9

DRIVER	
Manufacturer (driver)	Boke
Protection Class (driver)	1
Standby power Psb (W) <	0.5
Flicker metric (Pst LM) <	0.001
Stroboscopic effect metric (SVM) <	0.003
Max Output Voltage (V)	38
Dimming (driver)	Pull Dim
Dimming Minimum Level (%)	1.0
Dimming output type	Amplitude Modulation
IP (driver)	IP20
Expected Lifetime (driver) (h)	100000
Flicker-free	Yes
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	550 - 1300
CC (forward voltage driver) (V)	6.0 - 38.0
Output Current Tolerance (%)	2.0
Current Ripple (%)	2.0
Max load pr circuit - B10	28

**PRODUCT DATA SHEET**

Benu 5400lm 940 110°/75° 50W BK Pull Switchdim 18i3 3m cable  
Art.no: 3733-110-2



*Lighting Solutions*

DRIVER	
Max load pr circuit - B16	45
Max load pr circuit - C10	28
Max load pr circuit - C16	45
Max load pr circuit - C20	56
Max load pr circuit - C25	70
Leakage current (mA)	0.7
Inrush current time (µs)	162.0
Inrush current I <sub>max</sub> (A)	4.75

DIMENSIONS	
Length (product) (mm)	1205.0
Width (product) (mm)	44.0
Height (product) (mm)	72.0
Weight (product) (kg)	2.5

MATERIALS AND SURFACES	
Color	White
RAL Code	RAL9003
Housing Material	Aluminium
Diffuser Material	PMMA

INSTALLATION AND CONNECTION	
Areas of use	Office
Mounting	Suspended, Ceiling, Pendant
Connection (system)	18i3 Quick connection

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	F
CE mark	Yes
EPD number	NEPD-14346-14753



**PRODUCT DATA SHEET**

Benu 5400lm 940 110°/75° 50W BK Pull Switchdim 18i3 3m cable

Art.no: 3733-110-2



*Lighting Solutions*

**LIGHT DISTRIBUTION**

