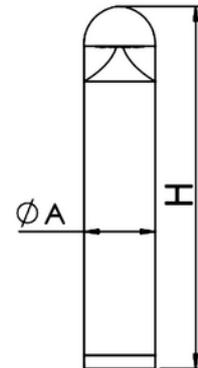


**PRODUCT DATA SHEET**

Nigea Bollard 1550lm 830 15W Omnidirectional D grey  
 Art.no: 3971-01-5

*Lighting Solutions*

$\phi A$ , mm	H, mm
165	800

## Nigea Bollard 1550lm 830 15W Omnidirectional D grey



A circular LED bollard emphasizing simple design and high vandal resistance. Diffuser in clear polycarbonate and impact resistance with reflector in matt aluminum and de-glaring performance. The bollards body is made by extruded aluminum in a dark grey finish.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK08
IP (system)	IP54
Outdoor	Yes
Operating temperature (°C)	-25 - 40

**PRODUCT DATA SHEET**

Nigea Bollard 1550lm 830 15W Omnidirectional D grey

Art.no: 3971-01-5

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	108
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
Lifetime (h)	L80B50: 50 000

DIMENSIONS	
Width (product) (mm)	165.0
Height (product) (mm)	800.0
Weight (product) (kg)	3.5

MATERIALS AND SURFACES	
Color	Dark Grey
Corrosion Class	C3

INSTALLATION AND CONNECTION	
Areas of use	Garden, Outdoor, Park
Mounting	Ground

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++



**PRODUCT DATA SHEET**

Nigea Bollard 1550lm 830 15W Omnidirectional D grey

Art.no: 3971-01-5



*Lighting Solutions*

**LIGHT DISTRIBUTION**

