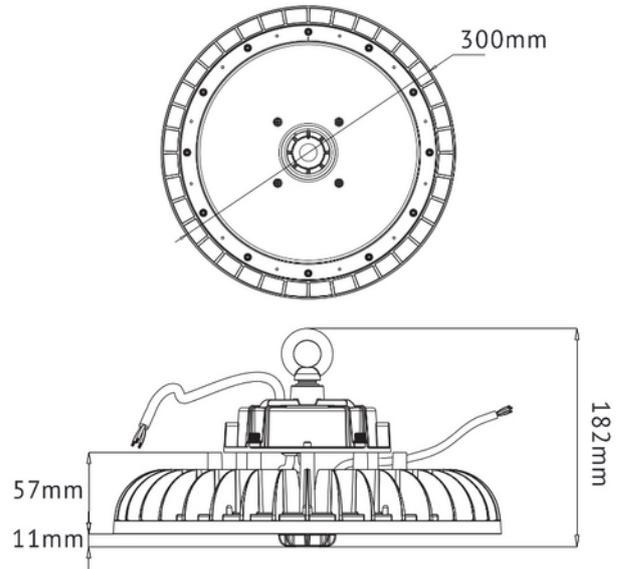


**PRODUCT DATA SHEET**

Ufo B High Bay 25.000lm 865 120° 150W BK 1-10V 5m 18i3

Art.no: 4216-02-2

*Lighting Solutions*

Ufo B High Bay 25.000lm 865 120° 150W BK 1-10V 5m 18i3



Ufo B high bay 150W is absolute top-notch concerning light output and mechanical strength. The luminaire is classified accordance to the IP65 norm. This makes UFO B very suitable for use in tough conditions. The light output from the UFO B is >160 lm/W, makes this a perfect choice. Add a PIR or microwave sensor to make your light control more cost efficient. Sensor can not be used together with DALI2 version. Ufo B high Bay are delivered with 1-10V / PWM dimming or DALI2. See accessories for variable choice of lampshade and lenses.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	PWM, 1-10V
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK08
IP (system)	IP65
Outdoor	No
Operating temperature (°C)	-35 - 50

**PRODUCT DATA SHEET**

Ufo B High Bay 25.000lm 865 120° 150W BK 1-10V 5m 18i3

Art.no: 4216-02-2

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	162
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	6500
Color Code	865
Lightsource Type	LED (built in)
Lens (Diffuser)	Lens
Lifetime (h)	L80B50: 91 000

DIMENSIONS	
Width (product) (mm)	300.0
Height (product) (mm)	116.0
Weight (product) (kg)	2.65

MATERIALS AND SURFACES	
Color	Black
Corrosion Class	C2
Surface treatment	Powdercoated
Housing Material	Aluminium
Housing Material %	41.58
Diffuser Material	Polycarbonate
Diffuser Material%	6.13
Recycled Aluminium %	93.0
Material 2%	0.4
Material 3%	0.8
Material 4%	6.2
Material 5%	19.900000000000002
Material 6%	24.990000000000002

INSTALLATION AND CONNECTION	
Areas of use	Industrial
Mounting	Suspended
Connection (system)	18i3 5m + 2x0,4m free end



PRODUCT DATA SHEET

Ufo B High Bay 25.000lm 865 120° 150W BK 1-10V 5m 18i3

Art.no: 4216-02-2



Lighting Solutions

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++