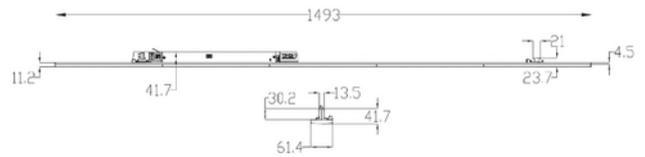


**PRODUCT DATA SHEET**

T-Line 7800lm 830 90° 35-50W\* 1500mm 3-Circuit BK

Art.no: 5030-90-2

*Lighting Solutions*

## T-Line 7800lm 830 90° 35-50W\* 1500mm 3-Circuit BK



T-Line is our new luminaire for mounting directly into 3-phase track. By using DIP-switch on the wattage setting, you can adjust power to optimize your wattage setting. Choose between 35/40/45W. Preset is set at 50W. T-line comes in 3000K or 4000K with 90°, 120° or double asymmetric beam.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No
Operating temperature (°C)	-25 - 60

**PRODUCT DATA SHEET**

T-Line 7800lm 830 90° 35-50W\* 1500mm 3-Circuit BK

Art.no: 5030-90-2

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	155
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Lightsource Type	LED (built in)
Lens (Diffuser)	Lens
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3

DRIVER	
Manufacturer (driver)	Coreshine
Protection Class (driver)	1
Dimming (driver)	None
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	null - 710
Current setting (driver)	DIP-switch
CC (forward voltage driver) (V)	55.0 - 80.0
Max load pr circuit - B10	24
Max load pr circuit - B16	30
Max load pr circuit - C10	24
Max load pr circuit - C16	38
Max load pr circuit - C25	60
Max load pr circuit - C32	76
Leakage current (mA)	0.95
Inrush current time (µs)	136.0
Inrush current I <sub>max</sub> (A)	20.0

DIMENSIONS	
Length (product) (mm)	1493.0
Width (product) (mm)	61.4
Height (product) (mm)	11.0
Weight (product) (kg)	1.32

