


**PRODUCT DATA SHEET**

T-Line 7500lm 930 90° 50(45-60W) 1500mm 3-Circuit BK  
 Art.no: 5035-90-2

*Lighting Solutions*

## T-Line 7500lm 930 90° 50(45-60W) 1500mm 3-Circuit BK

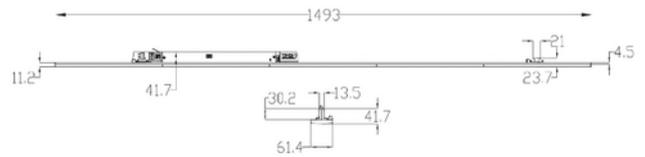

T-Line is our new luminaire for mounting directly into 3-phase track. By using DIP-switch on the wattage setting, you can adjust power to optimize your wattage setting. Choose between 35/40/45W. Preset is set at 50W. T-line comes in 3000K or 4000K with 90°, 120° or double asymmetric beam.

| ELECTRICAL DATA           |           |
|---------------------------|-----------|
| Protection Class (system) | 1         |
| Dimming (system)          | None      |
| Voltage (system) [V]      | 230V 50Hz |

| TECHNICAL DATA             |          |
|----------------------------|----------|
| IP (system)                | IP20     |
| Outdoor                    | No       |
| Operating temperature (°C) | -25 - 60 |

**PRODUCT DATA SHEET**

T-Line 7500lm 930 90° 50(45-60W) 1500mm 3-Circuit BK  
Art.no: 5035-90-2



*Lighting Solutions*

| PHOTOMETRIC DATA            |                 |
|-----------------------------|-----------------|
| CRI / Ra (>=)               | 90              |
| CCT (Color Temperature) (K) | 3000            |
| Color Code                  | 930             |
| Lightsource Type            | LED (built in)  |
| Socket / Cap-Base           | N/A             |
| Lens (Diffuser)             | Lens            |
| Lifetime (h)                | L80B10: 100 000 |
| MacAdam (SDCM)              | 3               |

| DRIVER                                 |       |
|--|-------|
| IP (driver)                            | IP20  |
| Expected Lifetime (driver) (h)         | 50000 |
| Constant current or voltage (CC or CV) | CC    |

| MATERIALS AND SURFACES |       |
|------------------------|-------|
| Color                  | Black |
| Housing Material       | Metal |
| Diffuser Material      | PMMA  |

| INSTALLATION AND CONNECTION |                 |
|-----------------------------|-----------------|
| Areas of use                | Generally, Shop |
| Mounting                    | Track           |
| Connection (system)         | Track 3-Circuit |

| ENERGY AND CERTIFICATIONS |                  |
|---------------------------|------------------|
| CE mark                   | Yes              |
| EPD number                | NEPD-12261-12310 |
| Energy Efficiency Class   | A++              |