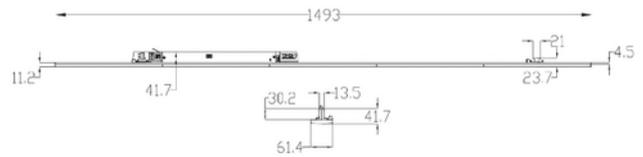


**PRODUCT DATA SHEET**

T-Line 7500lm 930 90° 50W 1500mm 3-Circuit BK DALI

Art.no: 5035-90-2-ddd

*Lighting Solutions*

## T-Line 7500lm 930 90° 50W 1500mm 3-Circuit BK DALI



T-Line is our new luminaire for mounting directly into 3-phase track. By using DIP-switch on the wattage setting, you can adjust power to optimize your wattage setting. Choose between 35/40/45W. Preset is set at 50W. T-line comes in 3000K or 4000K with 90°, 120° or double asymmetric beam.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	DALI
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No
Operating temperature (°C)	-25 - 60

**PRODUCT DATA SHEET**

T-Line 7500lm 930 90° 50W 1500mm 3-Circuit BK DALI

Art.no: 5035-90-2-ddd

*Lighting Solutions*

PHOTOMETRIC DATA	
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	3000
Color Code	930
Lightsource Type	LED (built in)
Lens (Diffuser)	Lens
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3

DRIVER	
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Constant current or voltage (CC or CV)	CC

DIMENSIONS	
Length (product) (mm)	1495.0
Width (product) (mm)	60.0
Height (product) (mm)	42.0
Weight (product) (kg)	1.32

MATERIALS AND SURFACES	
Color	Black
RAL Code	RAL9017
Housing Material	Metal
Diffuser Material	PMMA

INSTALLATION AND CONNECTION	
Areas of use	Generally, Shop
Mounting	Track
Connection (system)	Track 3-Circuit+dim

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	C
CE mark	Yes
EPD number	NEPD-12261-12310



**PRODUCT DATA SHEET**

T-Line 7500lm 930 90° 50W 1500mm 3-Circuit BK DALI

Art.no: 5035-90-2-ddd



*Lighting Solutions*

**ENERGY AND CERTIFICATIONS**

Energy Efficiency Class

A++