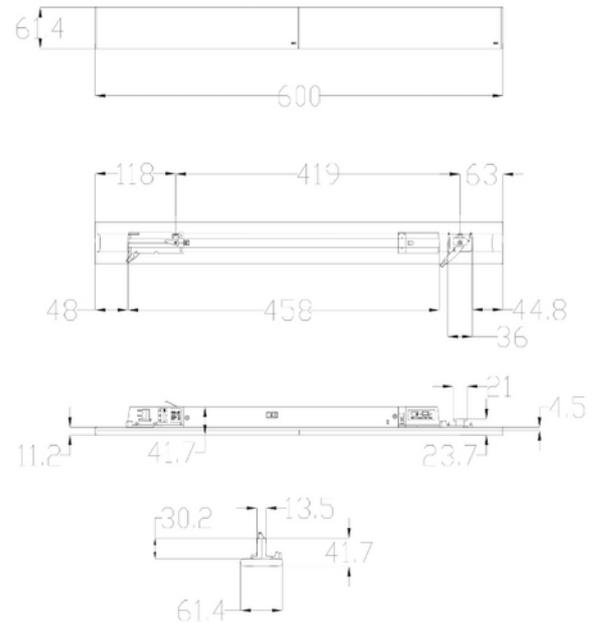


**PRODUCT DATA SHEET**

T-Line 3250lm 930 90° 20W\* 600mm 3-Circuit WH

Art.no: 5036-90-3

*Lighting Solutions*

## T-Line 3250lm 930 90° 20W\* 600mm 3-Circuit WH



T-Line is our new fixture designed for direct installation in a 3-phase track. The installation is quick and easy, as the T-Line clicks directly into the 3-phase track. The T-Line operates at 20W, but the light output can be adjusted down to 14W, 16W, or 18W using the DIP switch on the fixture. It comes with a 3000K color temperature and a 90° beam angle.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No
Operating temperature (°C)	-25 - 60

**PRODUCT DATA SHEET**

T-Line 3250lm 930 90° 20W\* 600mm 3-Circuit WH

Art.no: 5036-90-3

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	167
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	3000
Color Code	930
Lightsource Type	LED (built in)
Lens (Diffuser)	Lens
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3

DRIVER	
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Constant current or voltage (CC or CV)	CC

DIMENSIONS	
Length (product) (mm)	600.0
Width (product) (mm)	60.0
Height (product) (mm)	42.0
Weight (product) (kg)	0.6

MATERIALS AND SURFACES	
Color	White
RAL Code	RAL9016
Housing Material	Metal
Diffuser Material	PMMA

INSTALLATION AND CONNECTION	
Areas of use	Generally, Shop
Mounting	Track
Connection (system)	Track 3-Circuit

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++



**PRODUCT DATA SHEET**

T-Line 3250lm 930 90° 20W\* 600mm 3-Circuit WH

Art.no: 5036-90-3



*Lighting Solutions*