


**PRODUCT DATA SHEET**

Cylinder 60 1600lm 930 38° 14W (15°&25°) WH 1-circuit Phasec
 Art.no: 60130-7-38-3

*Lighting Solutions*

Cylinder 60 1600lm 930 38° 14W (15°&25°) WH 1-circuit Phasec

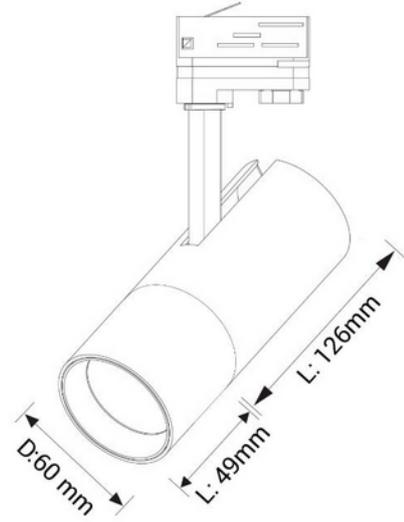

The Cylinder 60 has the LED driver included in the lamp head for use in 1-circuit tracks, It can be tilted 90 degrees and rotated 350 degrees on its own axis and comes with a variety of accessories. Delivered with 3000K, CRI90 and are phasecut dimmable. Choose between 15°, 25° and 38° lens, which are all included. 38° are standard lens on luminaire.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	Phase-Cut
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

**PRODUCT DATA SHEET**

Cylinder 60 1600lm 930 38° 14W (15°&25°) WH 1-circuit Phasec
Art.no: 60130-7-38-3



Lighting Solutions

PHOTOMETRIC DATA	
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	3000
Color Code	930
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 100 000
Manufacturer (light source)	Tridonic

DRIVER	
Manufacturer (driver)	Tridonic
Protection Class (driver)	2
Max Output Voltage (V)	55
Dimming Minimum Level (%)	5.0
Dimming Phasecut Type	Leading / Trailing edge
Dimming output type	Amplitude Modulation
IP (driver)	IP20
Expected Lifetime (driver) (h)	60000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	350 - null
CC (forward voltage driver) (V)	21.0 - 42.0
Output Current Tolerance (%)	7.5
Current Ripple (%)	30.0
Max load pr circuit - B10	50
Max load pr circuit - B16	80
Max load pr circuit - C10	50
Max load pr circuit - C16	80
Inrush current time (µs)	40.0

DIMENSIONS	
Length (product) (mm)	175.0
Width (product) (mm)	60.0
Height (product) (mm)	220.0
Weight (product) (kg)	0.6



PRODUCT DATA SHEET

Cylinder 60 1600lm 930 38° 14W (15°&25°) WH 1-circuit Phasec
Art.no: 60130-7-38-3



Lighting Solutions

MATERIALS AND SURFACES

Color	White
-------	-------

INSTALLATION AND CONNECTION

Areas of use	Cafe, Cottage, Hotel, Kitchen, Office, Residence, Restaurant, Shop, Showroom
Mounting	Track, Ceiling
Connection (system)	Track 1-Circuit

ENERGY AND CERTIFICATIONS

CE mark	Yes
Energy Efficiency Class	A++ - A

LIGHT DISTRIBUTION

