


**PRODUCT DATA SHEET**Cylinder 60 1550lm 927 25° 14W WH 3-circuit Phasecut  
Art.no: 60327-7-25-3*Lighting Solutions*

## Cylinder 60 1550lm 927 25° 14W WH 3-circuit Phasecut

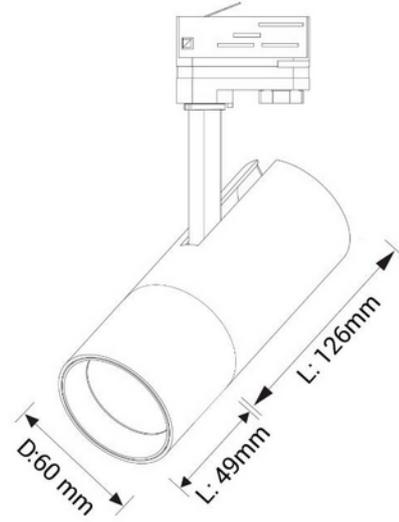

The Cylinder 60 has the LED driver included in the lamp head and is available for use in 1-circuit – and 3-circuit tracks, both models are available with a Dim to Warm option. It can be tilted 90 degrees and rotated 350 degrees on its own axis and comes with a variety of accessories.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	Phase-Cut
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
CRI / Ra (>=)	90

**PRODUCT DATA SHEET**

Cylinder 60 1550lm 927 25° 14W WH 3-circuit Phasecut

Art.no: 60327-7-25-3

*Lighting Solutions*

PHOTOMETRIC DATA	
CCT (Color Temperature) (K)	2700
Color Code	927
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 100 000
Manufacturer (light source)	Tridonic

DRIVER	
Manufacturer (driver)	Tridonic
Protection Class (driver)	2
Max Output Voltage (V)	55
Dimming Minimum Level (%)	5.0
Dimming Phasecut Type	Leading / Trailing edge
Dimming output type	Amplitude Modulation
IP (driver)	IP20
Expected Lifetime (driver) (h)	60000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	350 - null
CC (forward voltage driver) (V)	21.0 - 42.0
Output Current Tolerance (%)	7.5
Current Ripple (%)	30.0
Max load pr circuit - B10	50
Max load pr circuit - B16	80
Max load pr circuit - C10	50
Max load pr circuit - C16	80
Inrush current time ( $\mu$ s)	40.0

DIMENSIONS	
Length (product) (mm)	175.0
Width (product) (mm)	60.0
Height (product) (mm)	220.0
Weight (product) (kg)	0.6

**PRODUCT DATA SHEET**

Cylinder 60 1550lm 927 25° 14W WH 3-circuit Phasecut  
Art.no: 60327-7-25-3



*Lighting Solutions*

**MATERIALS AND SURFACES**

Color	White
-------	-------

**INSTALLATION AND CONNECTION**

Areas of use	Cafe, Cottage, Hotel, Kitchen, Office, Residence, Restaurant, Shop, Showroom
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit

**ENERGY AND CERTIFICATIONS**

CE mark	Yes
Energy Efficiency Class	A++ - A

**LIGHT DISTRIBUTION**