


**PRODUCT DATA SHEET**Anka 3700lm 740 26W R4 Assymmetric IP66 GR
Art.no: 6700-2-04-1*Lighting Solutions*

L, mm	W, mm	H, mm
525	250	102
625	288	102
776	320	102

Anka 3700lm 740 26W R4 Assymmetric IP66 GR

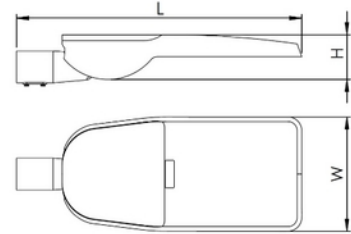

Anka is a luminaire for post mounting. We have developed this luminaire with an asymmetrical reflector giving a wide spread light, see light distribution diagram below. Anka has a post fixation opening with a diameter of 60mm. The luminaire has an IP66 classification and this guarantees that it will withstand very demanding conditions.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK09
IP (system)	IP66
Outdoor	Yes
Operating temperature (°C)	-25 - 40
Wind force (EPA) (m ²) at 0°	0.13

**PRODUCT DATA SHEET**

Anka 3700lm 740 26W R4 Assymmetric IP66 GR

Art.no: 6700-2-04-1

*Lighting Solutions*

PHOTOMETRIC DATA	
CRI / Ra (>=)	70
CCT (Color Temperature) (K)	4000
Color Code	740
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lifetime (h)	L90B10: 100 000
MacAdam (SDCM)	3

DIMENSIONS	
Length (product) (mm)	525.0
Width (product) (mm)	250.0
Height (product) (mm)	102.0
Weight (product) (kg)	5.0

MATERIALS AND SURFACES	
Color	Grey
RAL Code	RAL7022
Corrosion Class	C3

INSTALLATION AND CONNECTION	
Areas of use	Outdoor, Parking, Street
Mounting	Wall, Mast
Connection (system)	Terminal

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++



PRODUCT DATA SHEET

Anka 3700lm 740 26W R4 Assymetric IP66 GR

Art.no: 6700-2-04-1



Lighting Solutions

LIGHT DISTRIBUTION

